

## Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		4669.7 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	43.6V x 44.8H
	At 50% of Imax	18.8V x 20.0H
	At 90% of Imax	6.9V x 7.4H
Beam Flux	Total	1000.7 lumens per klm.
	To 10% of Imax	679.9 lumens per klm.
	To 50% of Imax	307.0 lumens per klm.
	To 90% of Imax	59.3 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.1 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 28DEG  
Operators: SENPU  
Test Date: 2022-08-30

$\gamma$  Range: 0 - 100DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000 SYSTEM V2.0.402  
Humidity: 61%  
Test Distance: 8.000m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.000V I:1.0360A P:24.860W PF:1.0000 Freq:0Hz Lamp Flux:2837.19x1 lm		
NAME: 1000mm Linear Wall Washer	TYPE:3000K Ra80	WEIGHT:
SPEC.:20deg	DIM.:	SERIAL No.:2022083003
MFR.:	SUR.:	Shielding Angle:

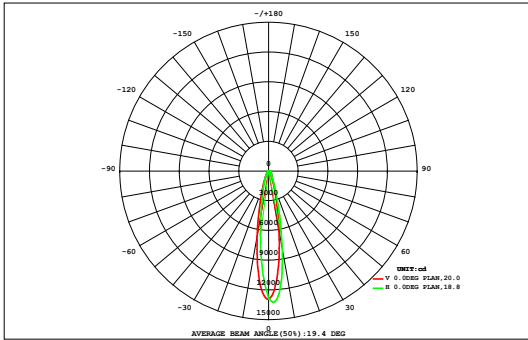

DATA OF LAMP		Eff:114.13lm/W	
MODEL		Imax (cd)	13249
NOMINAL POWER (W)	24	AVAILABILITY (%)	68.0
RATED VOLTAGE (V)	24	Avai. FLUX (lm)	1930
NOMINAL FLUX (lm)	2837.19	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	2837
TEST VOLTAGE (V)	24	θ @50% (H,V)	20,19DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm		Φ t	Φ a	
	0.87	1.03	1.21	1.41	1.62	1.80	1.95	2.07	2.14	2.13	2.05	1.91	1.76	1.58	1.38	1.18	1.00	0.85	27.9	0.00
27	1.02	1.23	1.47	1.75	2.05	2.33	2.56	2.74	2.86	2.85	2.71	2.52	2.29	2.00	1.71	1.44	1.20	0.99	35.7	0.00
24	1.19	1.47	1.80	2.18	2.62	3.06	3.43	3.70	3.89	3.88	3.66	3.37	3.00	2.56	2.13	1.75	1.43	1.16	46.3	11.9
21	1.38	1.75	2.19	2.72	3.35	4.04	4.68	5.18	5.47	5.43	5.07	4.60	3.97	3.29	2.67	2.15	1.71	1.36	61.0	39.7
18	1.58	2.05	2.66	3.41	4.31	5.40	6.49	7.30	7.83	7.79	7.21	6.39	5.30	4.24	3.36	2.62	2.02	1.55	81.5	64.7
15	1.77	2.36	3.16	4.22	5.60	7.23	9.08	10.7	11.5	11.5	10.5	8.96	7.12	5.55	4.21	3.14	2.34	1.75	111	97.8
12	1.95	2.65	3.65	5.09	7.09	9.70	12.7	15.7	17.2	17.1	15.6	12.6	9.74	7.15	5.12	3.66	2.64	1.93	151	140
9	2.11	2.91	4.10	5.91	8.57	12.5	17.2	21.6	24.4	24.3	21.6	17.5	12.7	8.74	6.03	4.18	2.96	2.13	199	190
6	2.22	3.11	4.47	6.59	9.89	14.8	21.0	27.3	31.3	31.5	28.1	21.9	15.6	10.6	7.04	4.73	3.24	2.28	246	237
3	2.28	3.24	4.71	7.08	11.0	16.9	24.2	31.2	35.4	35.5	31.7	25.0	17.7	11.7	7.56	4.98	3.36	2.35	276	267
0	2.30	3.26	4.76	7.14	10.9	16.3	22.9	29.8	33.8	34.0	30.2	23.5	16.8	11.3	7.35	4.87	3.31	2.32	265	256
-3	2.22	3.09	4.40	6.39	9.35	13.8	19.6	24.6	28.3	28.4	24.9	20.0	14.3	9.66	6.55	4.45	3.09	2.20	225	216
-6	2.02	2.76	3.81	5.43	7.69	10.9	14.6	18.3	20.7	20.8	18.5	14.9	11.2	7.88	5.54	3.84	2.76	2.01	174	163
-9	1.80	2.40	3.23	4.42	6.04	8.02	10.2	12.7	13.9	13.9	12.8	10.4	8.14	6.12	4.47	3.25	2.39	1.78	126	113
-12	1.57	2.06	2.71	3.56	4.58	5.79	7.12	8.36	8.97	8.98	8.39	7.16	5.83	4.60	3.56	2.70	2.05	1.56	89.6	74.8
-15	1.37	1.75	2.23	2.81	3.46	4.19	4.99	5.64	5.96	5.96	5.64	4.98	4.18	3.45	2.79	2.21	1.73	1.35	64.7	43.7
-18	1.18	1.47	1.81	2.20	2.63	3.10	3.57	3.92	4.07	4.07	3.91	3.56	3.08	2.61	2.18	1.79	1.45	1.16	47.8	15.5
-21	1.01	1.23	1.47	1.74	2.02	2.33	2.62	2.82	2.90	2.90	2.81	2.61	2.31	2.00	1.72	1.45	1.21	0.99	36.1	0.00
-24	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	29.8	39.8	53.9	74.1	103	142	189	234	261	261	235	192	145	105	75.4	54.4	39.9	29.7	2263	---
Φ a	0.00	4.37	29.7	56.0	87.9	129	178	223	250	251	225	180	132	89.6	57.6	30.9	4.88	0.00	---	1930

one-half-peak spread: U:9.6,D:9.3 , L:9.7,R:10.4


NEMA Beam Type: Type 3

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:28DEG  
 Operators:SENPU  
 Test Date:2022-08-30

γ Range: 0 - 100DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000 SYSTEM V2.0.402  
 Humidity:61%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.000V I:1.0360A P:24.860W PF:1.0000 Freq:0Hz Lamp Flux:2837.19x1 lm		
NAME: 1000mm Linear Wall Washer	TYPE:3000K Ra80	WEIGHT:
SPEC.:20deg	DIM.:	SERIAL No.:2022083003
MFR.:	SUR.:	Shielding Angle:

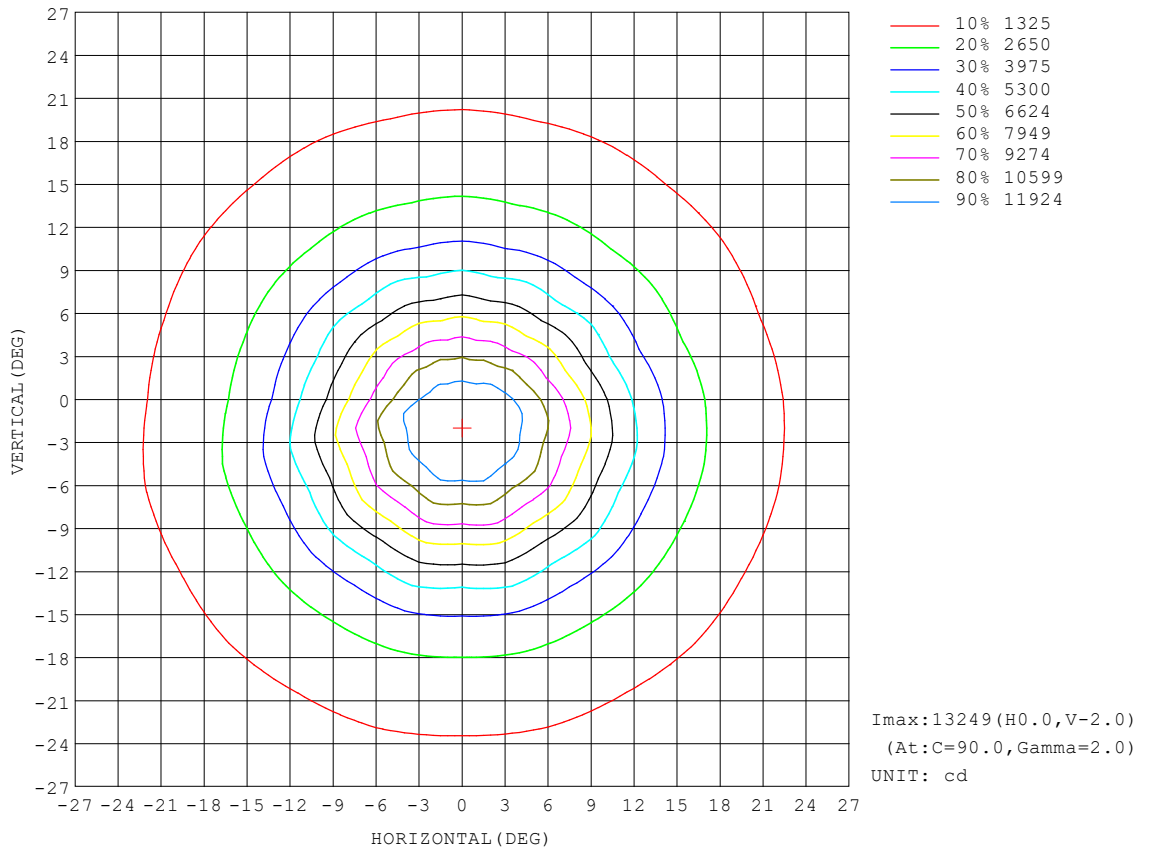


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:28DEG  
 Operators:SENPU  
 Test Date:2022-08-30

γ Range: 0 - 100DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000 SYSTEM V2.0.402  
 Humidity:61%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM


Test:U:24.000V I:1.0360A P:24.860W PF:1.0000 Freq:0Hz Lamp Flux:2837.19x1 lm		
NAME: 1000mm Linear Wall Washer	TYPE:3000K Ra80	WEIGHT:
SPEC.:20deg	DIM.:	SERIAL No.:2022083003
MFR.:	SUR.:	Shielding Angle:

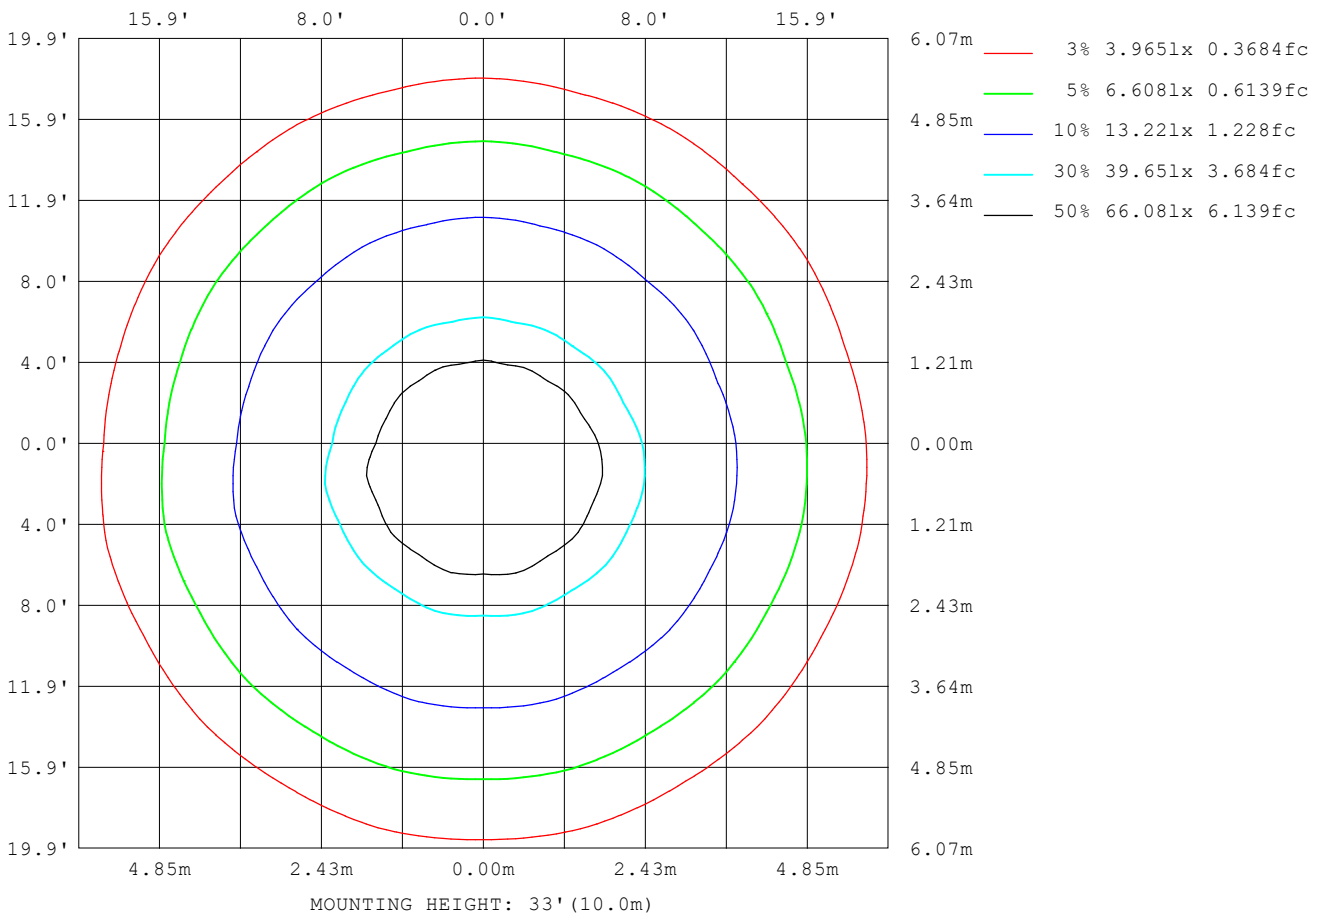

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:28DEG  
 Operators:SENPU  
 Test Date:2022-08-30

γ Range: 0 - 100DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000 SYSTEM V2.0.402  
 Humidity:61%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

## Planar Illuminance Curve

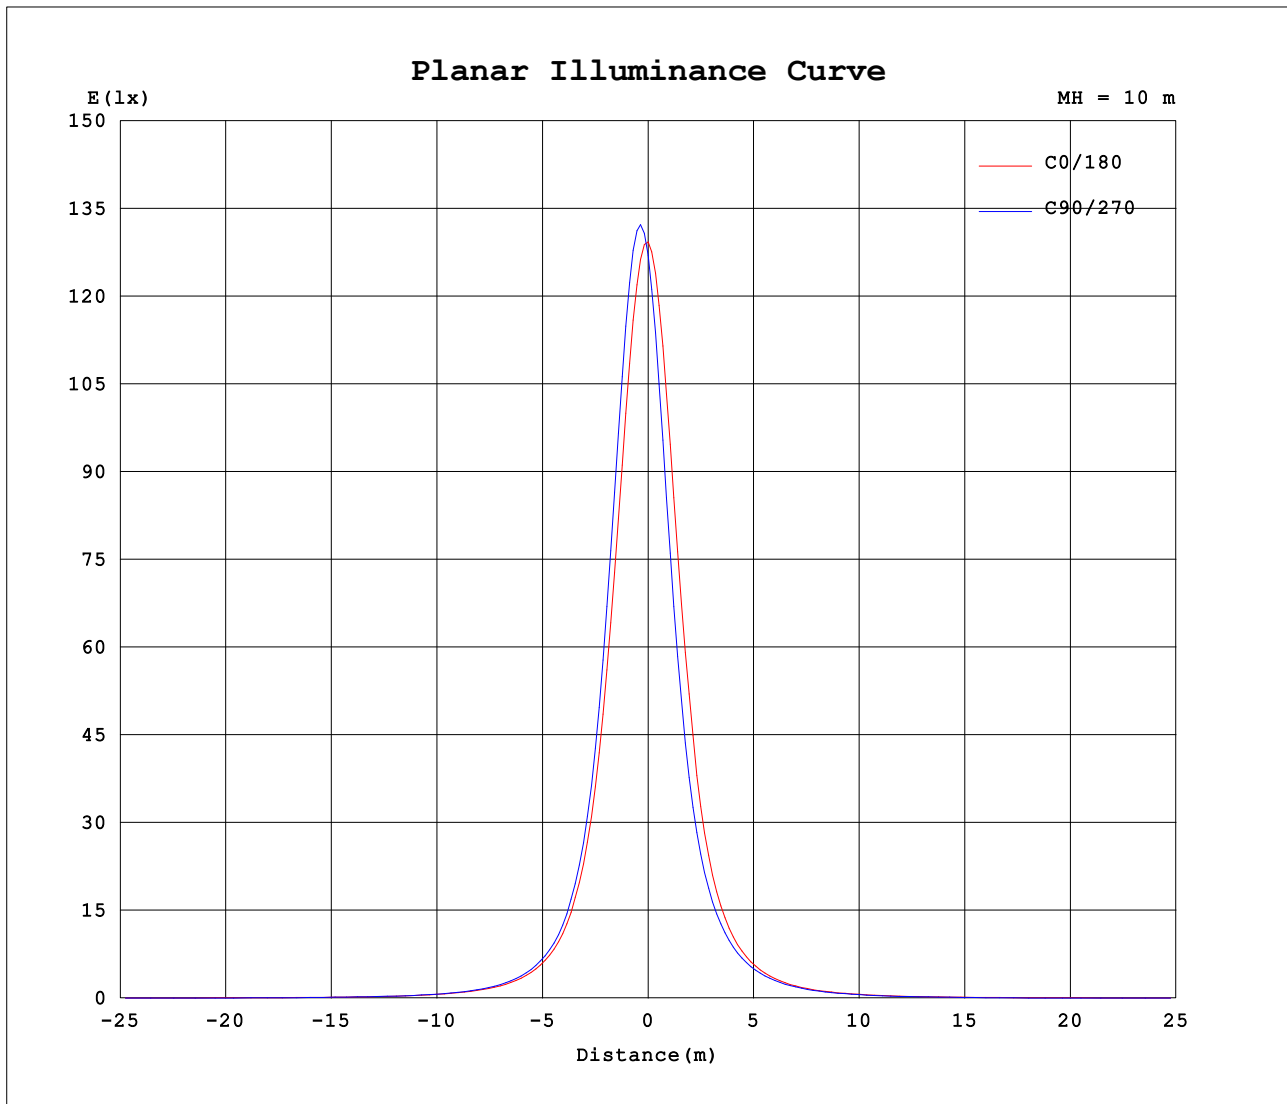


C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 28DEG  
Operators: SENPU  
Test Date: 2022-08-30

$\gamma$  Range: 0 - 100DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000 SYSTEM V2.0.402  
Humidity: 61%  
Test Distance: 8.000m [K=1.0000]  
Remarks:

**AAI Figure**

Test:U:24.000V I:1.0360A P:24.860W PF:1.0000 Freq:0Hz Lamp Flux:2837.19x1 lm		
NAME: 1000mm Linear Wall Washer	TYPE:3000K Ra80	WEIGHT:
SPEC.:20deg	DIM.:	SERIAL No.:2022083003
MFR.:	SUR.:	Shielding Angle:

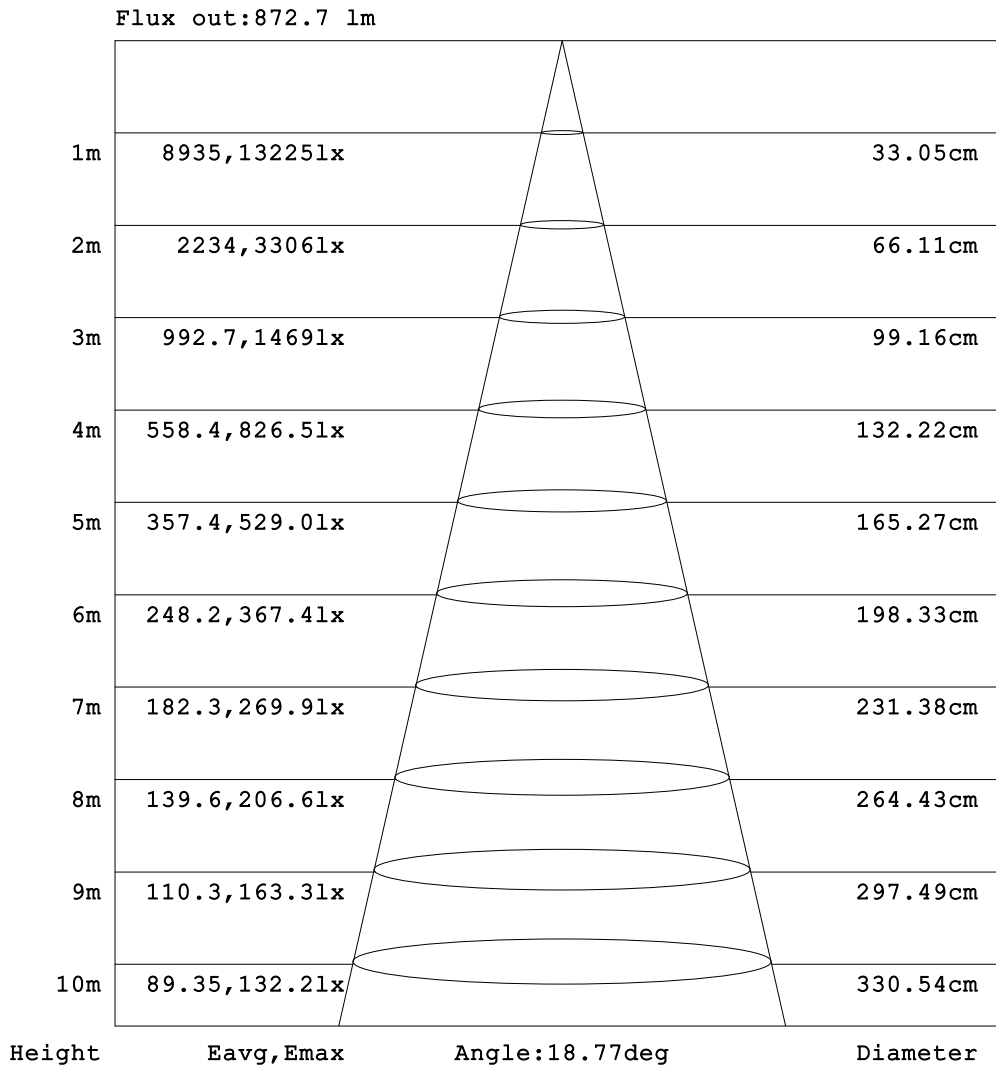

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:28DEG  
 Operators:SENPU  
 Test Date:2022-08-30

γ Range: 0 - 100DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000 SYSTEM V2.0.402  
 Humidity:61%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:1.0360A P:24.860W PF:1.0000 Freq:0Hz Lamp Flux:2837.19x1 lm		
NAME: 1000mm Linear Wall Washer	TYPE:3000K Ra80	WEIGHT:
SPEC.:20deg	DIM.:	SERIAL No.:2022083003
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: x10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.01	0.01	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.01	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.01	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.01	0.02	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.01	0.02	0.03	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.01	0.02	0.03	0.04	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.01	0.02	0.03	0.04	0.04	0.04	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.01	0.02	0.03	0.03	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
-90	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.06	0.06	0.07	0.07	0.08	0.08	0.09	0.09	0.10	0.10	0.10	0.10
-80	0.01	0.08	0.20	0.18	0.26	0.29	0.20	0.24	0.27	0.29	0.33	0.35	0.37	0.40	0.43	0.45	0.46	0.47	0.47
-70	0.01	0.29	0.54	0.88	1.20	1.28	1.31	1.55	1.74	1.85	2.04	2.16	2.18	2.27	2.35	2.35	2.37	2.33	2.24
-60	0.01	0.51	1.03	1.77	2.41	2.88	3.23	3.59	4.14	4.72	5.25	5.72	6.21	6.61	6.97	7.28	7.46	7.52	7.45
-50	0.01	0.70	1.50	2.52	3.67	4.20	4.73	5.46	6.33	7.27	8.30	9.36	10.4	11.4	12.4	13.3	14.0	14.3	14.3
-40	0.01	0.89	1.88	3.17	4.38	5.21	6.06	7.16	8.47	9.99	11.8	14.0	16.4	19.0	21.6	24.6	26.9	28.3	28.7
-30	0.01	1.05	2.17	3.60	4.77	5.90	7.19	8.71	10.6	13.0	16.1	20.3	25.8	32.6	40.6	49.5	58.8	65.2	66.6
-20	0.01	1.18	2.38	3.85	5.04	6.29	7.89	10.00	12.6	16.2	21.2	28.6	39.4	55.9	80.3	113	151	191	204
-10	0.01	1.27	2.49	3.95	5.15	6.47	8.25	10.6	13.8	18.4	25.4	36.7	55.5	87.0	143	249	447	683	801
0	0.01	1.32	2.51	3.93	5.11	6.41	8.21	10.6	13.9	18.6	26.0	37.9	58.4	95.0	166	313	619	1045	1293
10	0.01	1.24	2.40	3.83	5.05	6.31	8.02	10.3	13.3	17.6	24.1	33.9	49.7	75.8	119	190	291	406	457
20	0.01	1.12	2.20	3.60	4.83	5.99	7.49	9.37	11.9	15.2	19.7	26.2	35.4	48.4	65.0	86.9	110	127	135
30	0.01	0.98	1.92	3.18	4.43	5.50	6.65	8.07	9.89	12.2	15.0	18.5	22.9	28.3	34.5	41.0	46.7	50.7	52.3
40	0.01	0.82	1.55	2.59	3.81	4.73	5.46	6.48	7.76	9.17	10.8	12.6	14.7	16.9	19.2	21.1	22.8	23.9	24.3
50	0.01	0.66	1.10	1.91	2.81	3.50	4.08	4.68	5.46	6.33	7.17	8.08	9.07	10.0	10.8	11.4	11.9	12.3	12.3
60	0.01	0.47	0.68	1.09	1.62	1.92	2.29	2.69	2.95	3.30	3.82	4.15	4.47	4.83	5.01	5.06	5.20	5.31	5.24
70	0.01	0.27	0.39	0.30	0.55	0.70	0.59	0.68	0.80	0.81	0.85	0.95	1.00	1.04	1.08	1.07	1.10	1.11	1.09
80	0.01	0.06	0.16	0.07	0.08	0.10	0.10	0.12	0.14	0.15	0.16	0.18	0.19	0.21	0.23	0.25	0.25	0.26	0.26
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
110	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:28DEG  
 Operators:SENPU  
 Test Date:2022-08-30

γ Range: 0 - 100DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000 SYSTEM V2.0.402  
 Humidity:61%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:1.0360A P:24.860W PF:1.0000 Freq:0Hz Lamp Flux:2837.19x1 lm		
NAME: 1000mm Linear Wall Washer	TYPE:3000K Ra80	WEIGHT:
SPEC.:20deg	DIM.:	SERIAL No.:2022083003
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: x10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.03
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.03
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.03
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.03
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.03
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.03	0.03
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.04	0.03	0.03	0.03
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.04	0.03	0.03	0.03	0.03
-100	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
-90	0.10	0.10	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.06	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.03
-80	0.46	0.46	0.44	0.42	0.39	0.36	0.35	0.32	0.28	0.27	0.24	0.20	0.27	0.24	0.17	0.27	0.21	0.03
-70	2.31	2.32	2.29	2.29	2.20	2.12	2.08	1.96	1.78	1.68	1.50	1.28	1.24	1.15	0.82	0.57	0.43	0.03
-60	7.46	7.34	7.12	6.79	6.41	6.01	5.53	5.09	4.60	4.02	3.50	3.18	2.83	2.34	1.73	1.04	0.63	0.03
-50	14.2	13.8	13.1	12.1	11.1	10.1	9.08	8.05	7.11	6.24	5.37	4.67	4.21	3.66	2.48	1.53	0.82	0.03
-40	28.2	26.6	24.2	21.2	18.5	16.0	13.6	11.5	9.75	8.32	7.09	6.00	5.20	4.44	3.17	1.92	0.99	0.03
-30	64.8	58.2	48.8	39.9	32.0	25.2	19.8	15.7	12.7	10.4	8.58	7.14	5.89	4.85	3.67	2.22	1.16	0.03
-20	191	151	112	79.5	55.2	38.8	28.1	20.7	15.8	12.3	9.81	7.86	6.30	5.12	3.94	2.44	1.29	0.03
-10	691	467	255	144	86.3	54.6	36.0	25.1	18.1	13.6	10.5	8.27	6.54	5.26	4.06	2.58	1.39	0.03
0	1098	672	345	177	98.8	59.9	38.6	26.4	18.7	13.9	10.6	8.30	6.53	5.26	4.06	2.62	1.45	0.03
10	402	286	189	119	74.9	48.9	33.4	23.7	17.4	13.2	10.2	8.08	6.41	5.17	3.97	2.51	1.36	0.03
20	125	108	85.0	63.5	47.2	34.6	25.7	19.3	14.8	11.7	9.32	7.53	6.06	4.95	3.75	2.31	1.24	0.03
30	50.2	45.9	39.9	33.6	27.5	22.3	18.0	14.7	11.9	9.75	8.05	6.68	5.56	4.58	3.33	2.03	1.10	0.03
40	23.8	22.4	20.7	18.7	16.4	14.2	12.3	10.5	9.01	7.72	6.50	5.48	4.81	4.00	2.73	1.66	0.93	0.03
50	12.2	11.7	11.2	10.5	9.72	8.80	7.84	7.00	6.25	5.46	4.67	4.11	3.64	2.99	2.02	1.21	0.77	0.03
60	5.27	5.13	4.97	4.93	4.76	4.41	4.11	3.82	3.33	2.96	2.71	2.38	2.03	1.72	1.20	0.75	0.60	0.03
70	1.11	1.09	1.07	1.08	1.04	1.01	0.97	0.87	0.84	0.83	0.72	0.63	0.75	0.63	0.35	0.45	0.41	0.03
80	0.26	0.25	0.24	0.23	0.21	0.19	0.18	0.16	0.15	0.14	0.12	0.10	0.10	0.08	0.07	0.23	0.19	0.03
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.03
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.03
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.03
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.03	0.03
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.03
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.03
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.03
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.03
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.03

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:28DEG  
 Operators:SENPU  
 Test Date:2022-08-30

γ Range: 0 - 100DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000 SYSTEM V2.0.402  
 Humidity:61%  
 Test Distance:8.000m [K=1.0000]  
 Remarks: