

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		4817.8 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	43.2V x 43.8H
	At 50% of Imax	18.7V x 19.5H
	At 90% of Imax	6.9V x 7.3H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	683.4 lumens per klm.
	To 50% of Imax	296.6 lumens per klm.
	To 90% of Imax	54.9 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.0 %
Luminaire Efficiency (Light Output Ratio)		99.9 %

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 28DEG
Operators: SENPU
Test Date: 2022-08-30

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000 SYSTEM V2.0.402
Humidity: 61%
Test Distance: 8.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.000V I:1.0069A P:24.160W PF:1.0000 Freq:0Hz Lamp Flux:2360.04x1 lm		
NAME: 1000mm Linear Wall Washer	TYPE:3000K Ra90	WEIGHT:
SPEC.:20deg	DIM.:	SERIAL No.:2022083004
MFR.:	SUR.:	Shielding Angle:

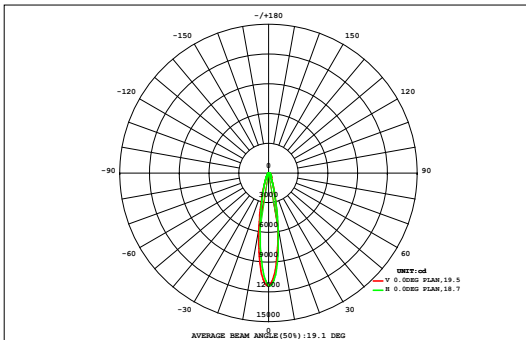

DATA OF LAMP		Eff:97.61lm/W	
MODEL		Imax (cd)	11370
NOMINAL POWER (W)	24	AVAILABILITY (%)	68.2
RATED VOLTAGE (V)	24	Avai. FLUX (lm)	1609
NOMINAL FLUX (lm)	2360.04	LOR (%)	99.9
LAMPS INSIDE	1	TOTAL FLUX (lm)	2358
TEST VOLTAGE (V)	24	θ @50% (H,V)	20,19DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.81	0.97	1.16	1.37	1.58	1.76	1.92	2.04	2.11	2.09	1.98	1.83	1.65	1.46	1.25	1.05	0.87	0.72	26.6	0.00
27	0.81	0.97	1.16	1.37	1.58	1.76	1.92	2.04	2.11	2.09	1.98	1.83	1.65	1.46	1.25	1.05	0.87	0.72	26.6	0.00
24	0.95	1.16	1.41	1.70	2.01	2.31	2.56	2.74	2.85	2.82	2.65	2.43	2.16	1.85	1.55	1.27	1.04	0.84	34.3	1.75
21	1.11	1.39	1.72	2.13	2.58	3.06	3.45	3.75	3.94	3.90	3.63	3.28	2.85	2.37	1.93	1.55	1.24	0.98	44.9	22.8
18	1.29	1.65	2.10	2.65	3.31	4.06	4.76	5.30	5.62	5.56	5.14	4.51	3.78	3.04	2.40	1.88	1.47	1.14	59.7	43.5
15	1.46	1.92	2.53	3.30	4.26	5.44	6.66	7.57	8.16	8.07	7.31	6.30	5.07	3.90	2.99	2.27	1.71	1.29	80.2	67.2
12	1.62	2.19	2.98	4.05	5.47	7.23	9.30	11.1	12.1	12.0	10.7	8.79	6.74	5.05	3.69	2.68	1.96	1.44	109	98.7
9	1.76	2.42	3.38	4.78	6.79	9.49	12.7	16.0	17.7	17.5	15.5	12.1	8.93	6.32	4.39	3.06	2.17	1.57	147	137
6	1.87	2.61	3.71	5.38	7.89	11.6	16.5	21.1	24.1	23.9	20.6	15.9	11.1	7.47	5.07	3.42	2.40	1.71	186	178
3	1.93	2.72	3.92	5.79	8.68	13.0	18.8	24.9	28.9	28.8	24.9	19.0	13.3	8.84	5.85	3.83	2.61	1.82	217	210
0	1.96	2.77	4.02	6.00	9.18	14.1	20.4	26.4	30.2	30.3	26.7	20.8	14.6	9.44	6.09	3.96	2.66	1.85	232	224
-3	1.94	2.74	3.97	5.89	8.85	13.1	18.3	23.7	26.8	26.8	23.7	18.3	13.0	8.67	5.67	3.75	2.56	1.79	210	202
-6	1.85	2.56	3.58	5.15	7.36	10.6	14.7	18.2	20.8	20.8	18.3	14.7	10.4	7.16	4.90	3.34	2.34	1.67	168	160
-9	1.66	2.24	3.05	4.21	5.89	8.05	10.5	12.9	14.4	14.4	12.9	10.4	7.90	5.69	3.98	2.83	2.05	1.50	124	114
-12	1.45	1.92	2.54	3.39	4.50	5.84	7.21	8.62	9.36	9.34	8.57	7.11	5.66	4.31	3.20	2.36	1.76	1.32	88.5	76.2
-15	1.25	1.62	2.10	2.69	3.38	4.16	5.02	5.74	6.09	6.07	5.67	4.88	4.01	3.23	2.53	1.95	1.49	1.14	63.0	47.3
-18	1.08	1.36	1.70	2.11	2.55	3.01	3.50	3.90	4.06	4.04	3.84	3.42	2.90	2.42	1.98	1.58	1.25	0.98	45.7	24.0
-21	0.91	1.13	1.37	1.64	1.93	2.24	2.53	2.74	2.83	2.81	2.70	2.46	2.15	1.84	1.55	1.28	1.04	0.84	34.0	2.45
-24	0.77	0.93	1.10	1.29	1.48	1.68	1.86	1.98	2.03	2.02	1.95	1.81	1.62	1.41	1.21	1.03	0.86	0.71	25.8	0.00
-27	0.77	0.93	1.10	1.29	1.48	1.68	1.86	1.98	2.03	2.02	1.95	1.81	1.62	1.41	1.21	1.03	0.86	0.71	25.8	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	25.7	34.3	46.4	63.5	87.7	121	161	199	222	221	197	158	118	84.5	60.2	43.1	31.5	23.3	1896	---
Φ a	0.00	4.06	26.2	48.0	74.9	110	151	189	215	213	187	148	106	70.6	43.3	21.2	1.99	0.00	---	1609


one-half-peak spread: U:9.9,D:8.9 , L:9.6,R:10.1 NEMA Beam Type: Type 3

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:SENPU
 Test Date:2022-08-30

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000 SYSTEM V2.0.402
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.000V I:1.0069A P:24.160W PF:1.0000 Freq:0Hz Lamp Flux:2360.04x1 lm		
NAME: 1000mm Linear Wall Washer	TYPE:3000K Ra90	WEIGHT:
SPEC.:20deg	DIM.:	SERIAL No.:2022083004
MFR.:	SUR.:	Shielding Angle:

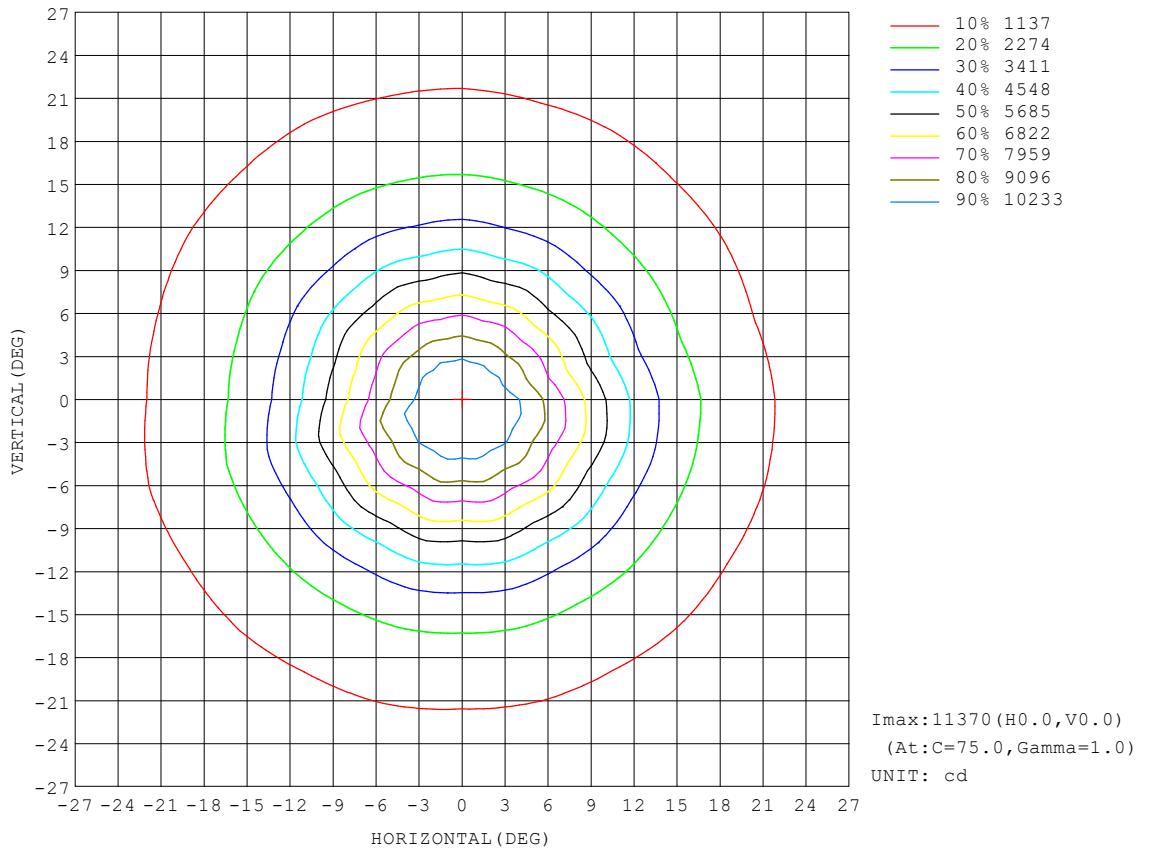


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:SENPU
 Test Date:2022-08-30

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000 SYSTEM V2.0.402
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:24.000V I:1.0069A P:24.160W PF:1.0000 Freq:0Hz Lamp Flux:2360.04x1 lm		
NAME: 1000mm Linear Wall Washer	TYPE:3000K Ra90	WEIGHT:
SPEC.:20deg	DIM.:	SERIAL No.:2022083004
MFR.:	SUR.:	Shielding Angle:

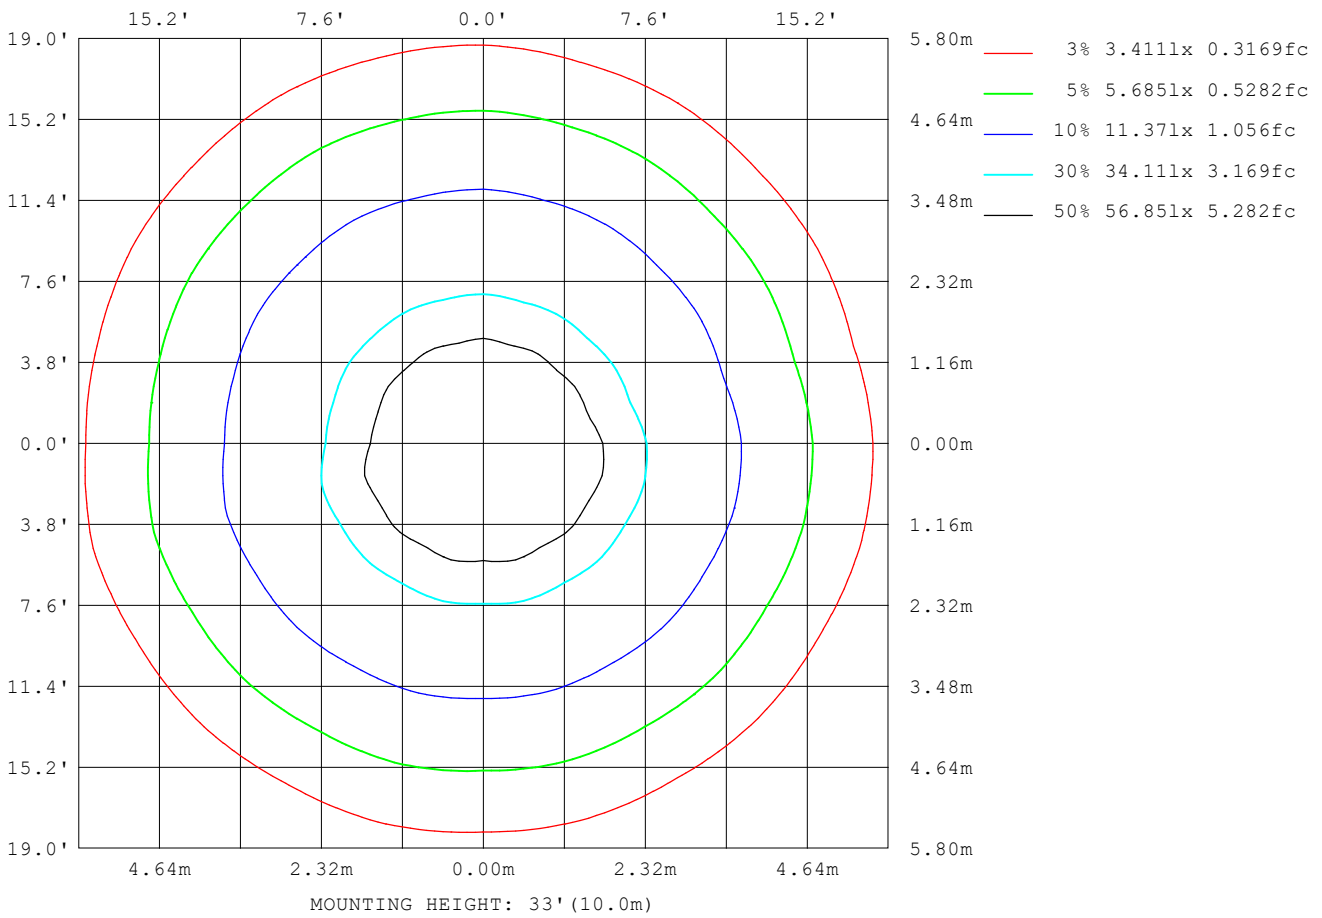

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:SENPU
 Test Date:2022-08-30

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000 SYSTEM V2.0.402
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

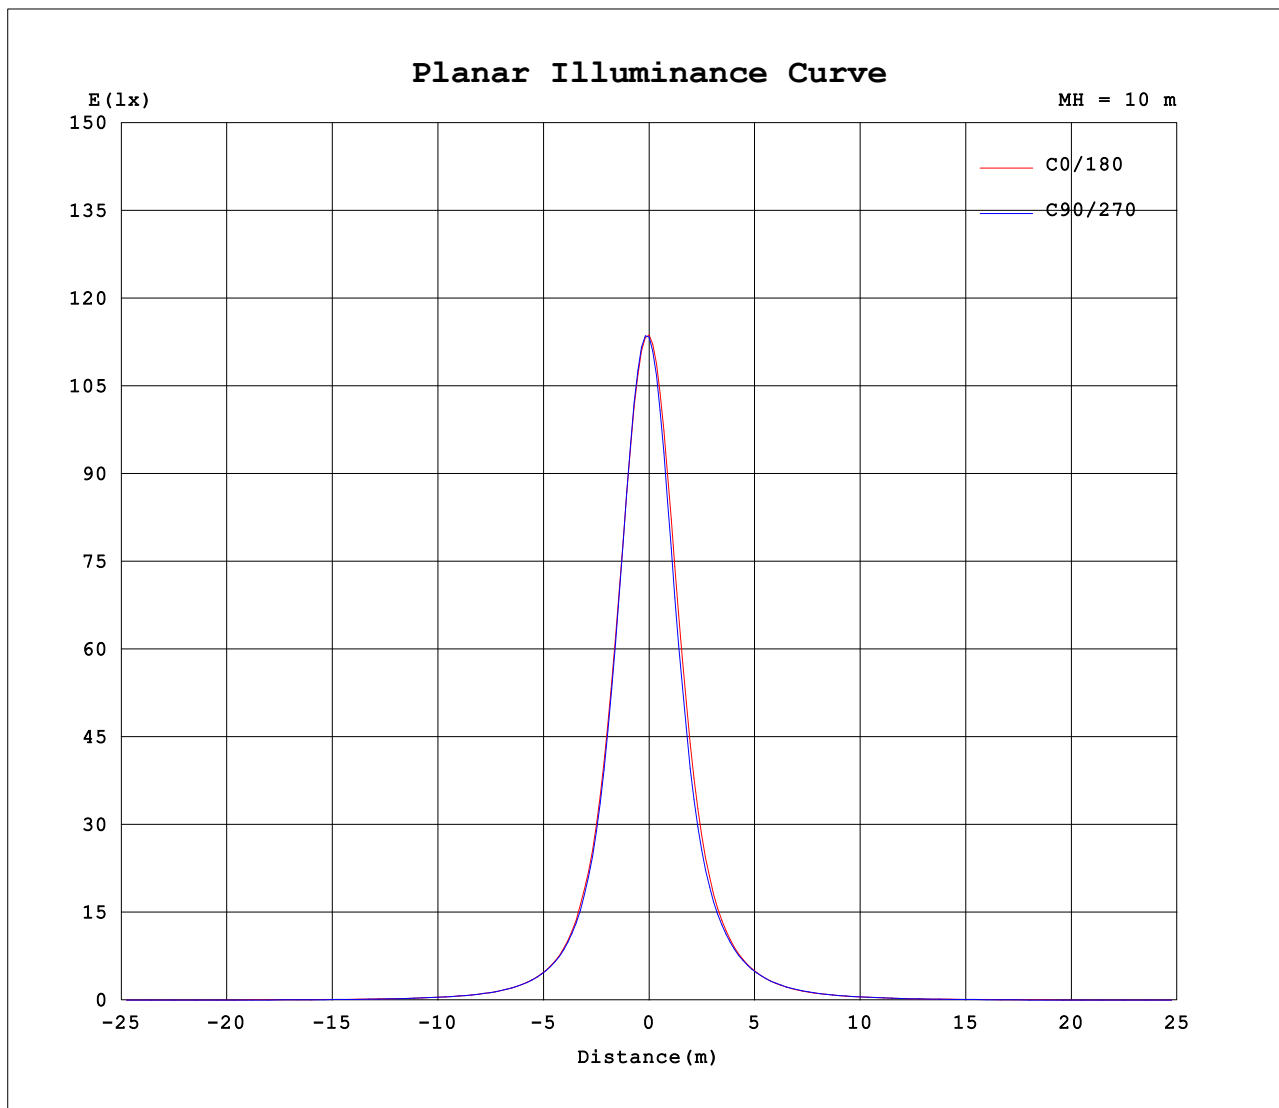


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 28DEG
Operators: SENPU
Test Date: 2022-08-30

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000 SYSTEM V2.0.402
Humidity: 61%
Test Distance: 8.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.000V I:1.0069A P:24.160W PF:1.0000 Freq:0Hz Lamp Flux:2360.04x1 lm		
NAME: 1000mm Linear Wall Washer	TYPE:3000K Ra90	WEIGHT:
SPEC.:20deg	DIM.:	SERIAL No.:2022083004
MFR.:	SUR.:	Shielding Angle:

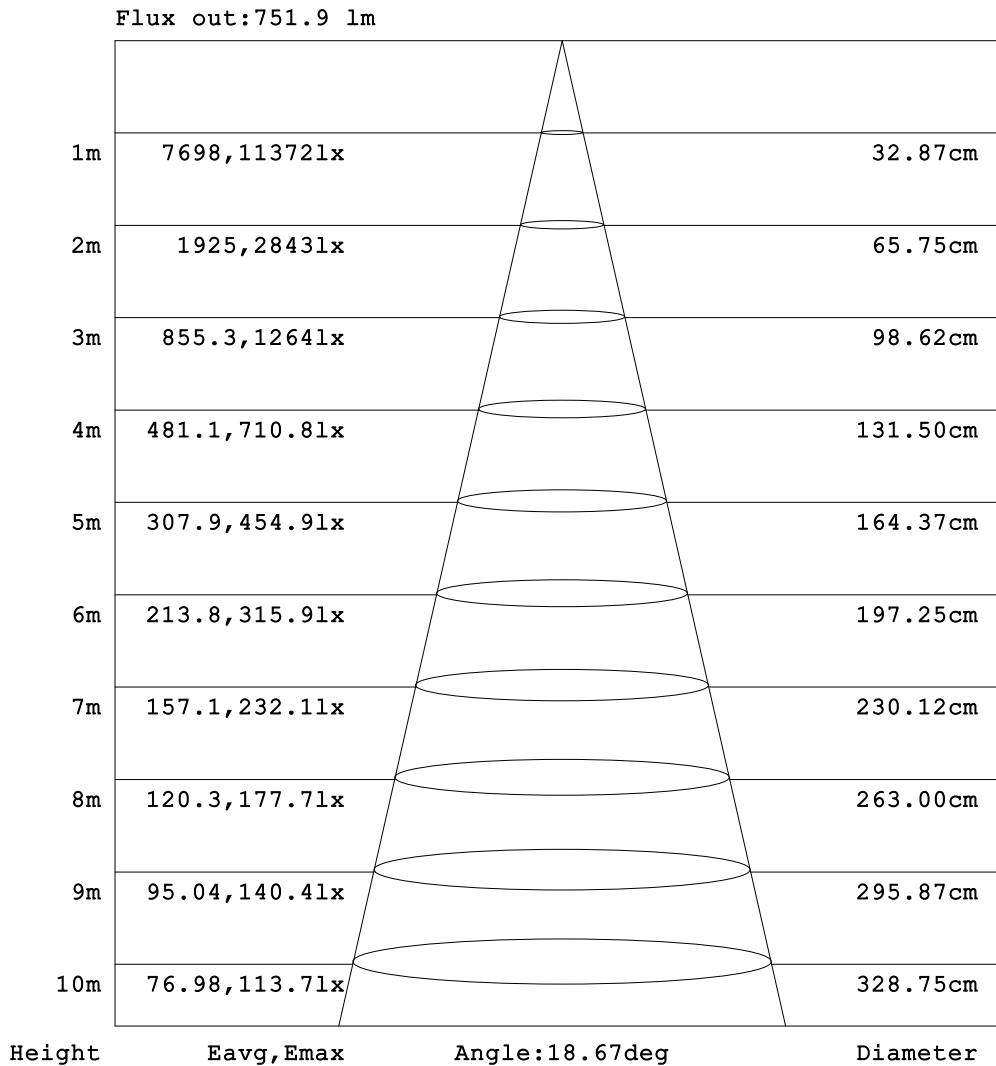

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:SENPU
 Test Date:2022-08-30

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000 SYSTEM V2.0.402
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:1.0069A P:24.160W PF:1.0000 Freq:0Hz Lamp Flux:2360.04x1 lm		
NAME: 1000mm Linear Wall Washer	TYPE:3000K Ra90	WEIGHT:
SPEC.:20deg	DIM.:	SERIAL No.:2022083004
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.01	0.01	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.01	0.01	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.01	0.01	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.01	0.02	0.02	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.01	0.02	0.02	0.03	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
-90	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
-80	0.01	0.08	0.17	0.13	0.18	0.20	0.16	0.19	0.22	0.22	0.26	0.29	0.30	0.33	0.35	0.37	0.37	0.38	0.39
-70	0.01	0.26	0.41	0.59	0.87	0.90	0.82	0.98	1.11	1.09	1.18	1.27	1.25	1.29	1.32	1.31	1.32	1.30	1.26
-60	0.01	0.43	0.76	1.33	1.77	2.12	2.41	2.65	3.00	3.46	3.84	4.07	4.40	4.68	4.85	5.01	5.10	5.10	4.98
-50	0.01	0.58	1.16	1.91	2.85	3.29	3.66	4.22	4.92	5.59	6.29	7.04	7.76	8.43	9.08	9.68	10.1	10.3	10.2
-40	0.01	0.72	1.47	2.46	3.49	4.13	4.81	5.70	6.71	7.83	9.19	10.8	12.5	14.3	16.1	18.0	19.5	20.3	20.4
-30	0.01	0.85	1.70	2.85	3.82	4.73	5.81	7.02	8.49	10.3	12.7	15.9	19.9	24.8	30.4	36.3	42.4	46.5	46.9
-20	0.01	0.96	1.88	3.08	4.04	5.08	6.44	8.13	10.3	13.1	17.1	23.1	31.4	43.7	61.3	83.6	109	132	138
-10	0.01	1.04	1.98	3.17	4.15	5.27	6.78	8.72	11.4	15.2	21.0	30.4	46.2	71.4	115	196	330	484	558
0	0.01	1.09	2.01	3.16	4.14	5.25	6.80	8.81	11.6	15.7	22.0	32.3	50.2	82.2	143	270	534	911	1137
10	0.01	1.02	1.93	3.11	4.11	5.20	6.70	8.65	11.3	15.1	20.7	29.8	44.6	69.4	112	183	292	422	487
20	0.01	0.93	1.79	2.95	3.96	4.96	6.29	7.96	10.2	13.1	17.3	23.5	32.4	45.3	62.3	85.1	110	128	136
30	0.01	0.82	1.58	2.63	3.68	4.57	5.60	6.91	8.56	10.6	13.3	16.6	20.9	26.3	32.6	39.3	45.2	49.2	50.5
40	0.01	0.69	1.30	2.16	3.20	3.96	4.62	5.59	6.79	8.06	9.53	11.3	13.3	15.5	17.8	19.7	21.2	22.3	22.6
50	0.01	0.56	0.94	1.61	2.41	3.00	3.48	4.04	4.81	5.59	6.38	7.22	8.16	9.09	9.85	10.4	10.9	11.2	11.3
60	0.01	0.41	0.58	0.97	1.40	1.67	2.07	2.39	2.63	3.06	3.56	3.82	4.22	4.60	4.74	4.82	4.96	5.04	4.97
70	0.01	0.25	0.34	0.29	0.53	0.64	0.57	0.64	0.78	0.78	0.80	0.91	0.95	0.97	1.01	1.00	1.02	1.03	1.03
80	0.01	0.07	0.15	0.07	0.08	0.10	0.10	0.12	0.14	0.15	0.18	0.19	0.22	0.23	0.25	0.26	0.27	0.28	0.28
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
110	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:SENPU
 Test Date:2022-08-30

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000 SYSTEM V2.0.402
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:1.0069A P:24.160W PF:1.0000 Freq:0Hz Lamp Flux:2360.04x1 lm		
NAME: 1000mm Linear Wall Washer	TYPE:3000K Ra90	WEIGHT:
SPEC.:20deg	DIM.:	SERIAL No.:2022083004
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: x10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.03
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.03
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.03
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.03
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.03
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.03	0.03
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.03	0.03	0.03
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.03	0.03	0.03	0.03	0.03
-100	0.03	0.03	0.03	0.03	0.03	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
-90	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
-80	0.38	0.37	0.36	0.34	0.32	0.29	0.28	0.25	0.22	0.20	0.17	0.15	0.17	0.14	0.11	0.21	0.17	0.03
-70	1.28	1.28	1.26	1.25	1.21	1.15	1.15	1.06	0.96	0.97	0.83	0.71	0.79	0.73	0.46	0.42	0.34	0.03
-60	5.01	4.93	4.78	4.58	4.36	4.06	3.75	3.52	3.12	2.70	2.40	2.18	1.89	1.59	1.18	0.71	0.50	0.03
-50	10.1	9.82	9.29	8.63	7.93	7.24	6.53	5.81	5.15	4.50	3.86	3.42	3.09	2.61	1.77	1.09	0.64	0.03
-40	20.0	18.9	17.2	15.3	13.4	11.6	9.97	8.46	7.19	6.17	5.23	4.45	3.92	3.33	2.31	1.43	0.78	0.03
-30	45.7	40.9	34.6	28.5	23.0	18.3	14.6	11.6	9.42	7.75	6.42	5.35	4.47	3.71	2.75	1.68	0.90	0.03
-20	130	105	79.1	56.9	40.0	28.5	20.7	15.5	11.8	9.28	7.41	5.93	4.80	3.94	3.02	1.87	1.01	0.03
-10	484	325	188	107	64.8	41.3	27.3	19.0	13.8	10.4	8.01	6.28	5.01	4.07	3.16	2.00	1.10	0.03
0	957	571	284	143	78.7	47.2	30.2	20.4	14.5	10.7	8.19	6.36	5.04	4.09	3.19	2.06	1.16	0.03
10	406	271	168	101	61.6	39.3	26.4	18.5	13.6	10.2	7.91	6.21	4.95	4.03	3.12	1.97	1.09	0.03
20	124	103	77.7	55.8	39.9	28.7	20.8	15.4	11.7	9.10	7.22	5.81	4.70	3.87	2.95	1.82	0.99	0.03
30	47.7	42.6	36.2	29.6	23.7	18.7	14.9	11.9	9.51	7.71	6.29	5.19	4.33	3.59	2.63	1.60	0.88	0.03
40	21.7	20.2	18.4	16.4	14.1	12.0	10.2	8.59	7.29	6.17	5.14	4.30	3.78	3.14	2.14	1.31	0.76	0.03
50	11.0	10.5	9.87	9.18	8.37	7.47	6.57	5.79	5.11	4.40	3.73	3.27	2.89	2.36	1.58	0.95	0.62	0.03
60	4.96	4.80	4.60	4.45	4.28	3.91	3.52	3.26	2.80	2.43	2.21	1.95	1.62	1.36	0.95	0.60	0.49	0.03
70	1.03	1.01	0.99	0.98	0.94	0.91	0.87	0.77	0.74	0.73	0.60	0.54	0.62	0.50	0.28	0.37	0.33	0.03
80	0.28	0.27	0.26	0.24	0.23	0.21	0.19	0.17	0.14	0.13	0.11	0.09	0.10	0.08	0.06	0.19	0.16	0.03
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.03
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.03
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.03
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.03
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.02	0.03
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.03
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.02	0.03
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.02	0.03
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.03
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.03

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:28DEG
 Operators:SENPU
 Test Date:2022-08-30

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000 SYSTEM V2.0.402
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks: