

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		11238.9 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		1.0 degrees horizontal
Beam Spread	At 10% of Imax	29.2V x 27.3H
	At 50% of Imax	14.6V x 12.9H
	At 90% of Imax	5.5V x 4.7H
Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	751.1 lumens per klm.
	To 50% of Imax	356.1 lumens per klm.
	To 90% of Imax	64.0 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.0 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: SENPU
Test Date: 2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.444
Humidity: 61%
Test Distance: 8.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.30V I:0.321A P:70.10W PF:0.987 Freq:50.00Hz		
Lamp Flux:6648.94x1 lm		
NAME: JSJ-N(11.1°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

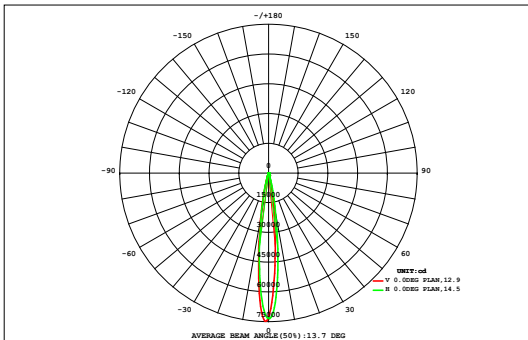

DATA OF LAMP		Eff: 94.85lm/W	
MODEL		Imax (cd)	74727
NOMINAL POWER (W)		AVAILABILITY (%)	75.1
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	4992
NOMINAL FLUX (lm)	6648.94	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	6649
TEST VOLTAGE (V)	221.2	θ @50% (H, V)	13,15DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		Φ t	Φ a
	0.66	0.80	0.98	1.20	1.45	1.70	1.95	2.18	2.36	2.39	2.28	2.08	1.85	1.60	1.33	1.09	0.89	0.74	27.5	0.00
27	0.66	0.80	0.98	1.20	1.45	1.70	1.95	2.18	2.36	2.39	2.28	2.08	1.85	1.60	1.33	1.09	0.89	0.74	27.5	0.00
24	0.77	0.96	1.22	1.55	1.97	2.45	2.93	3.39	3.78	3.86	3.61	3.22	2.75	2.24	1.76	1.38	1.09	0.87	39.8	0.00
21	0.90	1.17	1.53	2.04	2.77	3.74	4.80	5.84	6.68	6.86	6.31	5.44	4.37	3.27	2.41	1.79	1.36	1.04	62.3	0.00
18	1.06	1.42	1.94	2.73	3.99	5.96	8.34	10.7	13.0	13.4	11.9	9.86	7.28	5.02	3.38	2.35	1.68	1.24	105	0.00
15	1.21	1.69	2.45	3.69	5.85	9.50	15.2	20.5	25.6	26.7	23.3	18.6	12.3	7.69	4.84	3.09	2.07	1.45	186	81.3
12	1.36	1.97	3.01	4.90	8.35	14.6	25.5	38.5	49.6	52.2	45.2	32.6	20.0	11.7	6.70	3.95	2.47	1.64	324	250
9	1.48	2.21	3.52	6.09	11.4	21.7	39.1	65.3	87.6	93.8	78.9	52.3	31.0	16.9	8.65	4.77	2.83	1.83	529	467
6	1.60	2.42	3.94	6.97	13.5	27.7	54.6	93.3	136	148	117	75.5	41.4	20.5	10.3	5.61	3.26	2.06	763	706
3	1.66	2.56	4.25	7.65	15.2	31.3	62.6	113	169	190	148	92.5	51.4	25.8	12.7	6.59	3.69	2.25	940	882
0	1.70	2.65	4.47	8.25	17.0	36.2	72.4	127	182	195	160	104	57.5	28.5	13.7	6.95	3.83	2.31	1023	969
-3	1.71	2.68	4.54	8.30	16.5	32.6	61.5	104	144	155	128	83.5	48.1	25.1	12.7	6.51	3.64	2.23	840	782
-6	1.64	2.48	3.99	6.82	12.4	23.9	44.3	68.6	93.1	99.3	82.3	58.6	34.1	18.3	9.85	5.47	3.22	2.04	570	508
-9	1.46	2.12	3.22	5.26	9.13	16.5	26.5	39.9	51.1	53.9	46.4	33.6	22.2	12.8	7.19	4.27	2.68	1.79	340	268
-12	1.27	1.77	2.58	3.98	6.34	9.90	14.8	21.4	25.4	26.5	24.0	17.9	12.8	8.33	5.17	3.26	2.17	1.52	189	79.5
-15	1.09	1.48	2.06	2.95	4.22	5.97	8.33	11.2	12.6	12.9	12.2	9.60	7.18	5.22	3.62	2.49	1.76	1.28	106	0.00
-18	0.94	1.23	1.62	2.15	2.85	3.73	4.92	6.04	6.59	6.74	6.46	5.49	4.33	3.33	2.53	1.90	1.42	1.08	63.3	0.00
-21	0.80	1.01	1.28	1.60	2.00	2.50	3.09	3.58	3.79	3.86	3.76	3.35	2.78	2.25	1.82	1.45	1.15	0.90	41.0	0.00
-24	0.68	0.83	1.01	1.22	1.46	1.76	2.07	2.31	2.42	2.45	2.40	2.21	1.91	1.60	1.35	1.12	0.92	0.76	28.5	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	22.0	31.5	47.6	77.3	136	252	453	736	1014	1092	903	610	363	200	110	64.0	40.2	27.0	6179	---
Φ a	0.00	0.00	0.00	0.00	11.9	164	385	674	952	1035	842	543	288	98.4	0.00	0.00	0.00	0.00	---	4992


one-half-peak spread: U:6.8,D:7.8 , L:6.3,R:6.7 NEMA Beam Type: Type 2 x 3 (H x V)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: SENPU
 Test Date: 2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity: 61%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:221.30V I:0.321A P:70.10W PF:0.987 Freq:50.00Hz Lamp Flux:6648.94x1 lm		
NAME: JSJ-N(11.1°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

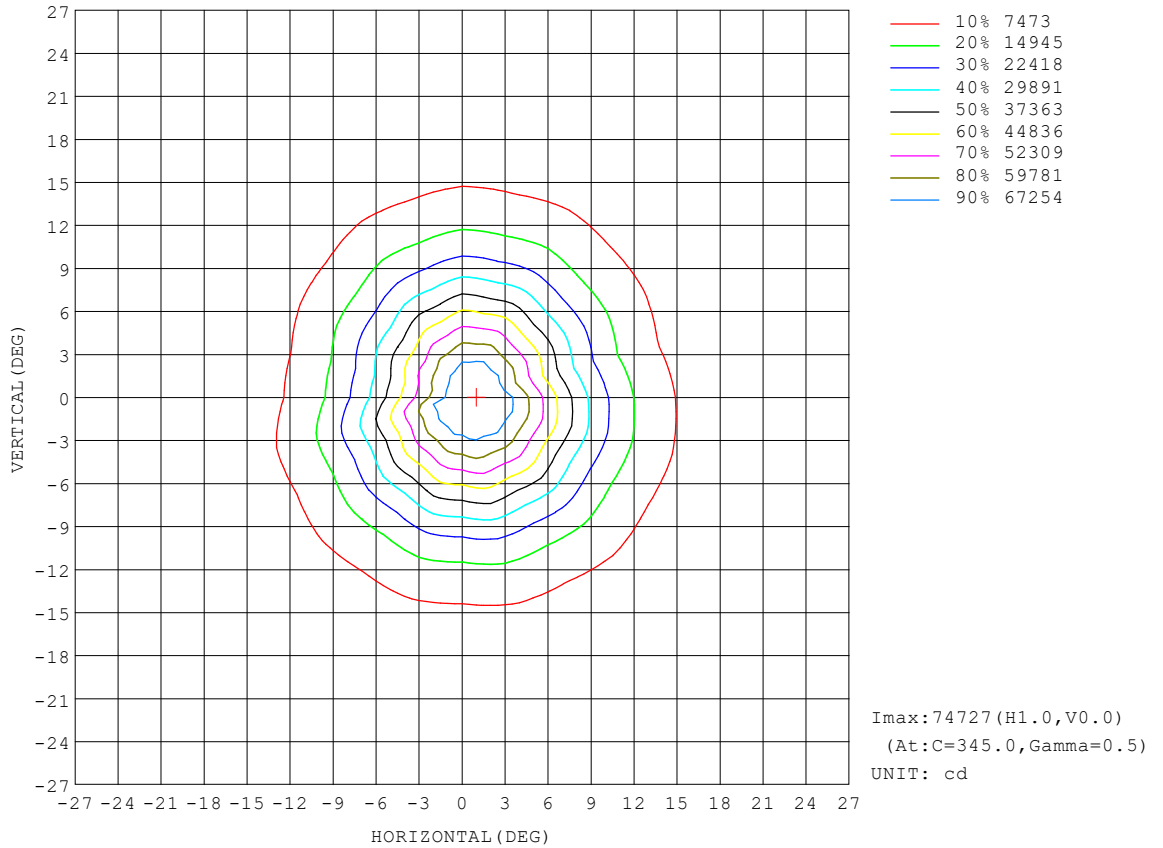


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: SENPU
Test Date: 2023-07-02

γ Range: 0 - 100DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.444
Humidity: 61%
Test Distance: 8.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:221.30V I:0.321A P:70.10W PF:0.987 Freq:50.00Hz Lamp Flux:6648.94x1 lm		
NAME: JSJ-N(11.1°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

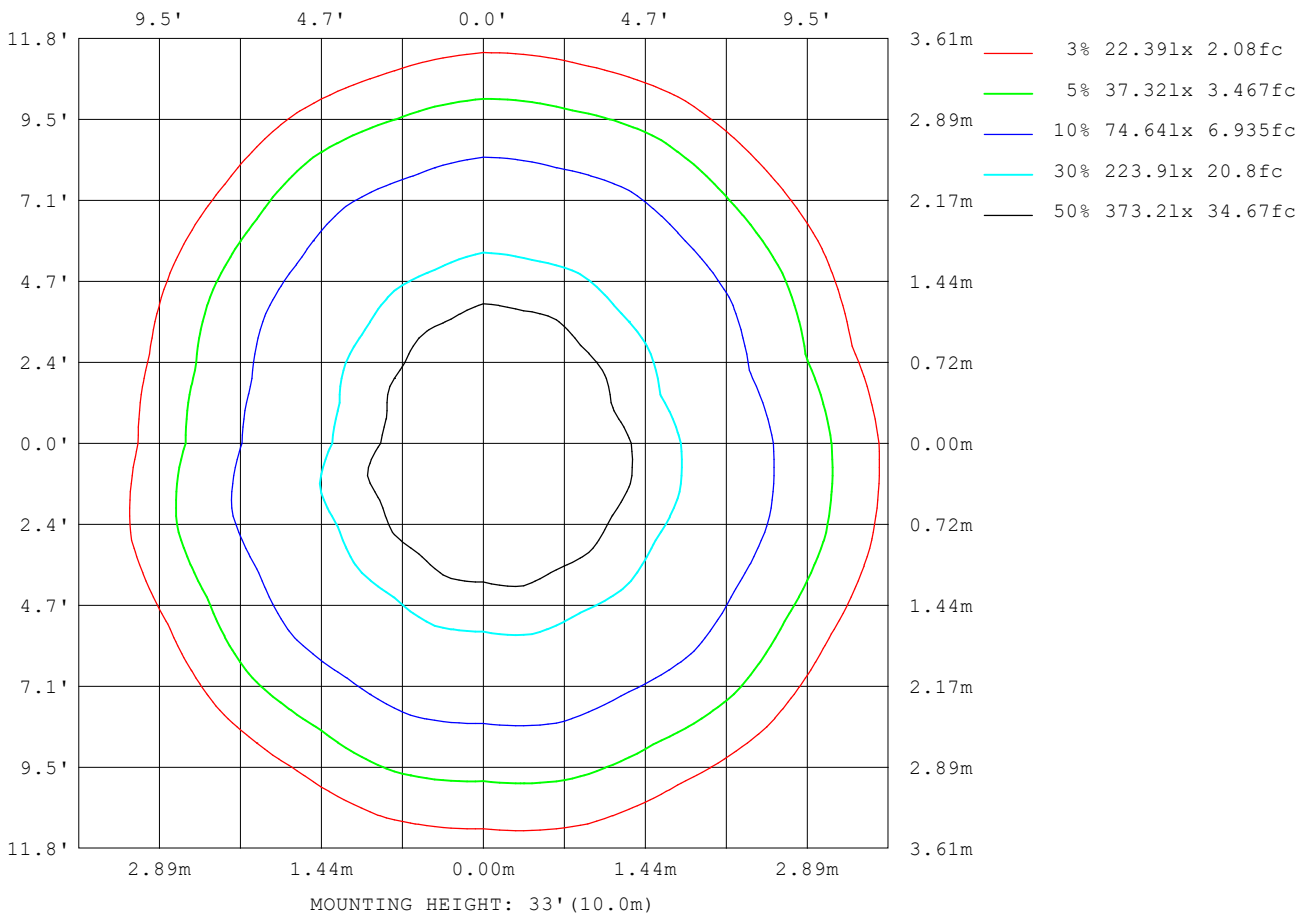

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

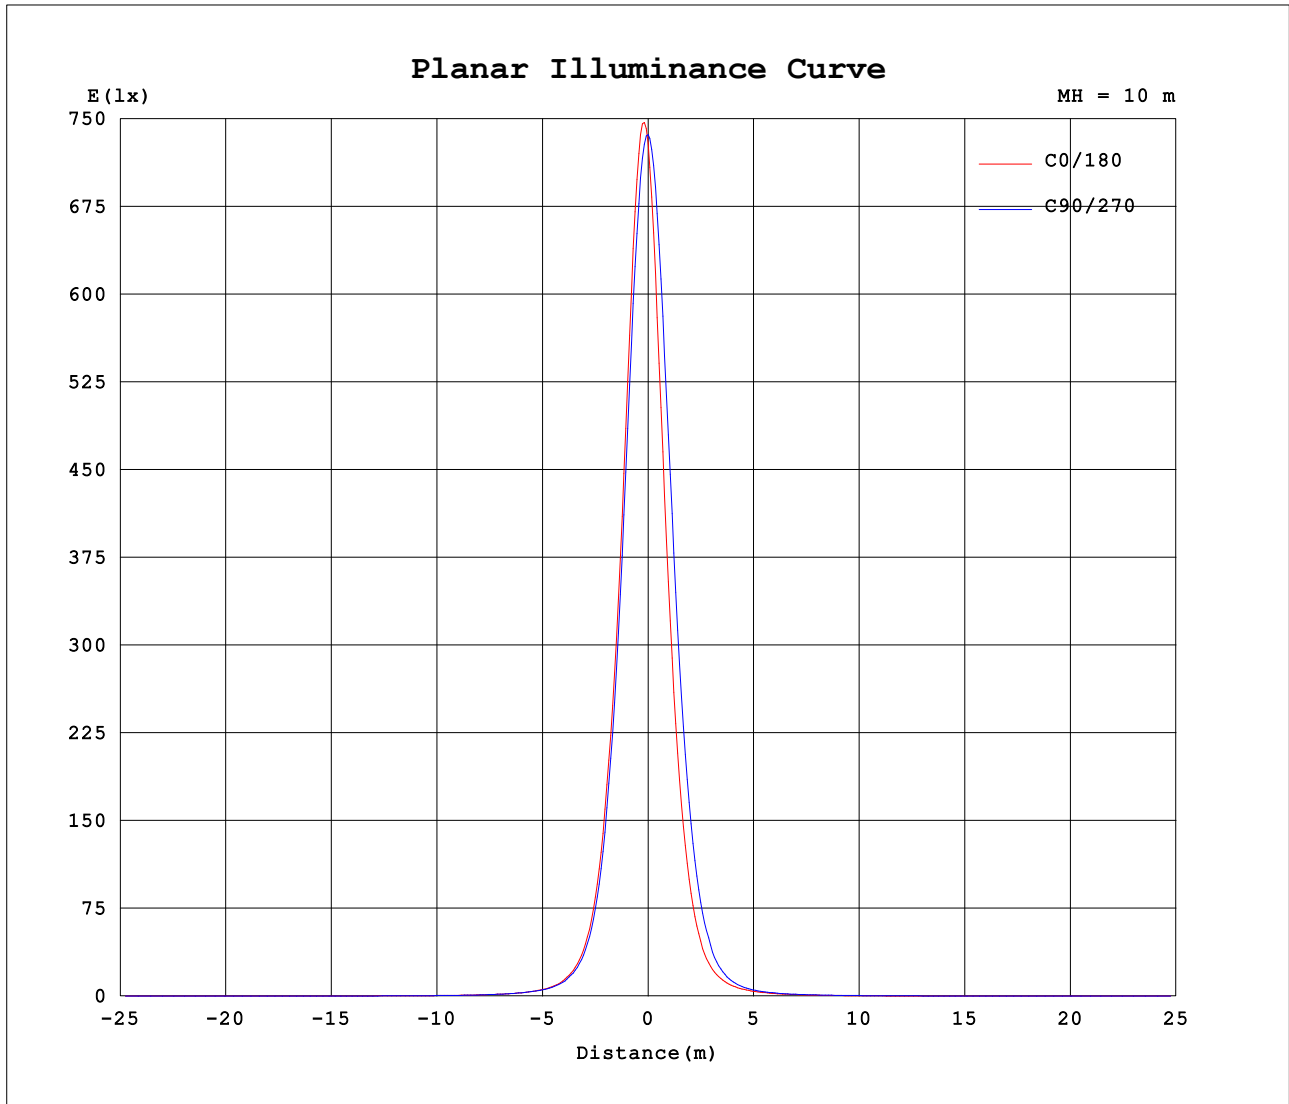


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: SENPU
 Test Date: 2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity: 61%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:221.30V I:0.321A P:70.10W PF:0.987 Freq:50.00Hz Lamp Flux:6648.94x1 lm		
NAME: JSJ-N(11.1°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

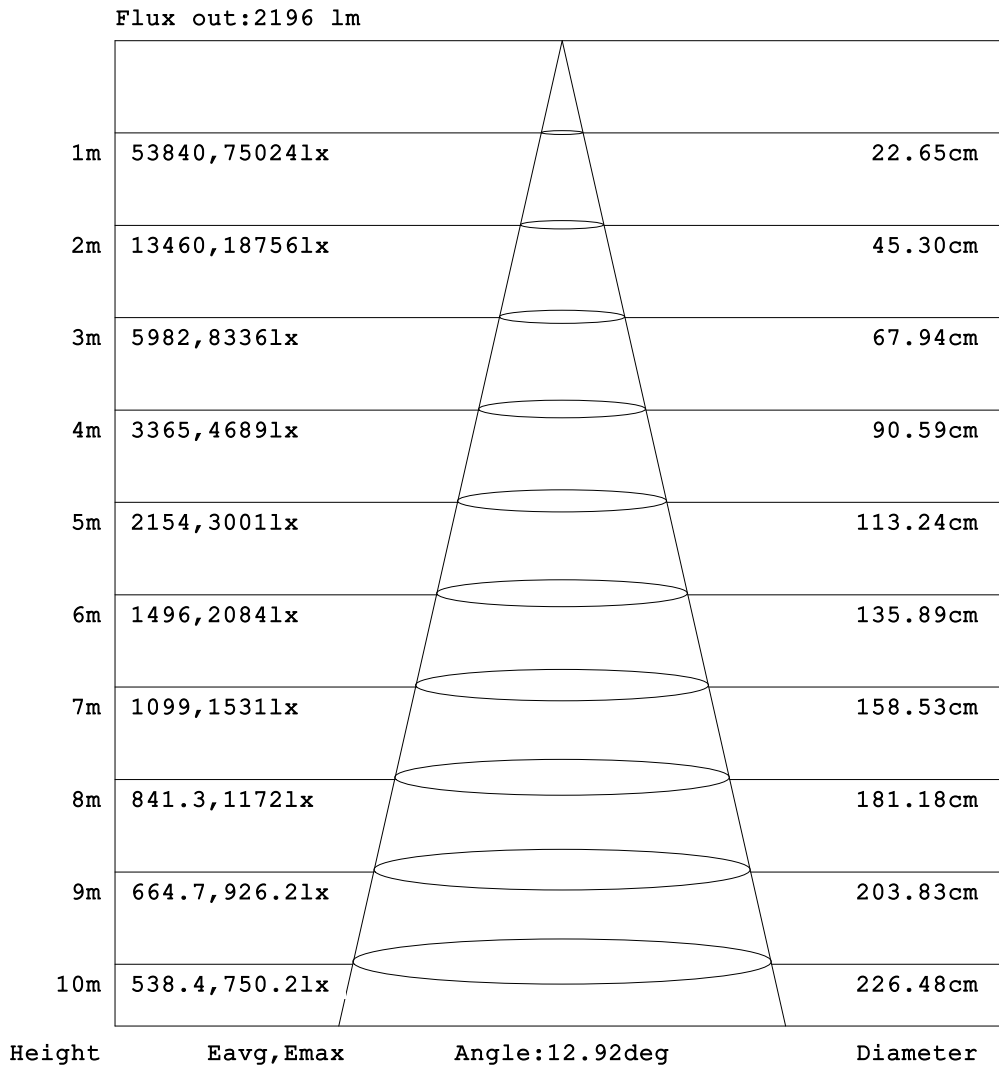

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.30V I:0.321A P:70.10W PF:0.987 Freq:50.00Hz Lamp Flux:6648.94x1 lm		
NAME: JSJ-N(11.1°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.01	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.01	0.02	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.01	0.03	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.01	0.03	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.01	0.04	0.06	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.01	0.04	0.07	0.09	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.01	0.04	0.07	0.10	0.10	0.10	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.01	0.04	0.07	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.11
-90	0.01	0.04	0.06	0.09	0.08	0.08	0.07	0.07	0.07	0.07	0.07	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.07
-80	0.01	0.03	0.06	0.08	0.08	0.08	0.07	0.07	0.07	0.07	0.08	0.09	0.09	0.49	1.03	1.64	1.93	2.17	2.37
-70	0.01	0.03	0.06	0.08	0.08	0.08	0.09	0.09	0.09	0.08	0.42	1.04	1.82	2.98	3.96	4.74	5.02	5.15	5.24
-60	0.01	0.03	0.06	0.07	0.08	0.09	0.09	0.13	0.60	1.29	2.24	4.00	5.68	6.75	7.29	7.74	8.09	8.36	8.55
-50	0.01	0.03	0.06	0.08	0.10	0.10	0.23	0.92	1.84	3.59	5.74	7.63	8.74	9.52	10.2	10.9	11.5	12.0	12.3
-40	0.01	0.04	0.06	0.09	0.10	0.13	0.94	1.88	3.57	6.31	8.57	10.5	12.1	13.7	15.4	17.4	19.3	20.7	21.3
-30	0.01	0.04	0.06	0.09	0.10	0.58	1.50	3.07	5.95	8.58	11.1	14.0	17.7	22.2	27.6	34.2	41.9	49.1	52.3
-20	0.01	0.04	0.06	0.09	0.10	0.91	2.00	4.33	7.41	10.5	13.9	19.1	26.6	38.2	57.4	87.7	133	195	219
-10	0.01	0.04	0.06	0.09	0.11	1.08	2.30	5.12	8.31	11.7	16.3	24.5	37.9	63.4	119	266	714	1483	2130
0	0.01	0.03	0.06	0.09	0.10	1.08	2.28	5.10	8.32	11.8	16.5	25.3	40.3	71.4	150	402	1347	3942	7284
10	0.01	0.03	0.06	0.09	0.10	1.03	2.18	4.86	8.09	11.4	15.6	23.1	35.1	58.6	111	248	625	1468	2163
20	0.01	0.03	0.06	0.09	0.10	0.82	1.80	3.61	7.03	10.2	13.6	18.6	25.9	36.8	54.4	84.6	133	188	225
30	0.01	0.03	0.05	0.09	0.10	0.40	1.35	2.74	5.64	8.56	11.2	13.9	17.4	21.6	27.1	33.6	40.1	46.1	49.9
40	0.01	0.03	0.04	0.08	0.10	0.11	0.82	1.73	3.27	6.32	8.70	10.7	12.3	13.9	15.7	17.4	18.9	20.3	21.2
50	0.01	0.02	0.04	0.06	0.09	0.10	0.15	0.83	1.69	3.41	5.75	7.82	9.24	10.2	11.0	11.6	12.2	12.6	13.0
60	0.01	0.02	0.04	0.05	0.07	0.09	0.09	0.11	0.46	1.16	2.06	3.95	6.00	7.40	8.03	8.55	8.92	9.16	9.33
70	0.01	0.01	0.03	0.05	0.05	0.06	0.07	0.08	0.09	0.09	0.31	0.88	1.64	2.86	4.04	4.94	5.26	5.44	5.57
80	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.05	0.06	0.07	0.08	0.08	0.35	0.77	1.30	1.75	2.11	2.41
90	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.01
100	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01
110	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.01	0.01	0.01	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.01	0.01	0.01	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.30V I:0.321A P:70.10W PF:0.987 Freq:50.00Hz Lamp Flux:6648.94x1 lm		
NAME: JSJ-N(11.1°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: x10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.11	0.09
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.11	0.09
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.11	0.09
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.10	0.09
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.10	0.09
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.10	0.10	0.09
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.08	0.10	0.10	0.09
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.08	0.09	0.10	0.10	0.09
-100	0.11	0.11	0.12	0.11	0.11	0.10	0.09	0.09	0.08	0.08	0.08	0.09	0.09	0.10	0.10	0.10	0.10	0.09
-90	0.07	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.10	0.10	0.10	0.11	0.11	0.11	0.10	0.10	0.10	0.09
-80	2.41	2.43	2.41	1.75	1.07	0.39	0.23	0.16	0.15	0.13	0.12	0.10	0.10	0.10	0.10	0.10	0.09	0.09
-70	5.25	5.22	5.13	4.96	4.73	4.22	3.08	1.91	0.96	0.43	0.16	0.13	0.12	0.10	0.09	0.09	0.09	0.09
-60	8.44	8.26	8.02	7.73	7.39	7.05	6.63	6.01	4.36	2.52	1.15	0.38	0.13	0.12	0.09	0.08	0.09	0.09
-50	12.2	11.8	11.3	10.7	10.1	9.63	9.10	8.46	7.48	5.85	3.28	1.55	0.60	0.13	0.12	0.08	0.08	0.09
-40	21.0	20.0	18.3	16.3	14.6	13.1	11.8	10.7	9.68	8.52	6.32	3.25	1.36	0.28	0.13	0.09	0.08	0.09
-30	50.6	44.5	36.7	30.1	24.3	19.6	15.9	13.3	11.5	10.1	8.28	5.43	2.19	0.84	0.13	0.11	0.08	0.09
-20	209	152	102	66.7	43.9	30.3	22.1	16.9	13.6	11.5	9.71	6.98	3.15	1.19	0.13	0.11	0.07	0.09
-10	1790	970	374	157	78.1	45.4	29.1	20.5	15.4	12.5	10.4	7.76	3.95	1.39	0.15	0.12	0.07	0.09
0	5714	2334	726	238	99.4	52.6	32.3	21.8	16.1	12.9	10.6	7.95	4.11	1.42	0.14	0.12	0.07	0.09
10	1760	855	347	144	71.5	41.6	27.6	19.7	15.1	12.4	10.4	7.62	3.67	1.32	0.14	0.12	0.07	0.09
20	204	153	99.0	63.1	42.2	29.5	21.6	16.6	13.5	11.5	9.48	6.59	2.71	1.08	0.13	0.11	0.07	0.09
30	47.6	42.7	36.3	29.6	23.8	19.3	16.0	13.6	11.9	10.3	8.09	4.69	1.84	0.67	0.13	0.09	0.07	0.09
40	20.7	19.6	18.2	16.6	14.9	13.4	12.2	11.1	10.1	8.70	5.98	2.77	1.13	0.13	0.12	0.08	0.06	0.09
50	12.8	12.4	12.0	11.5	10.9	10.3	9.65	8.89	7.66	5.66	2.80	1.31	0.31	0.12	0.09	0.06	0.07	0.09
60	9.24	9.06	8.81	8.50	8.12	7.65	6.98	5.98	4.05	2.14	0.96	0.22	0.11	0.09	0.06	0.05	0.07	0.09
70	5.55	5.48	5.36	5.17	4.89	4.26	2.94	1.64	0.67	0.23	0.10	0.09	0.07	0.05	0.04	0.05	0.07	0.09
80	2.41	2.39	2.30	1.57	0.82	0.16	0.10	0.09	0.07	0.06	0.04	0.04	0.03	0.03	0.03	0.05	0.07	0.09
90	0.02	0.03	0.03	0.03	0.03	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.04	0.07	0.09
100	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.02	0.02	0.02	0.04	0.07	0.09
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.05	0.07	0.09
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.08	0.09
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.08	0.09
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.09	0.09
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.09	0.09
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.10	0.09
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.10	0.09
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.11	0.09

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks: