

## Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5196.3 cd per klm. 0.5 degrees vertical 0.5 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	43.5V x 42.1H 21.3V x 20.2H 8.1V x 7.5H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	1000.2 lumens per klm. 784.1 lumens per klm. 383.4 lumens per klm. 68.8 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.0 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25DEG  
Operators: SENPU  
Test Date: 2023-07-01

$\gamma$  Range: 0 - 100DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
Humidity: 61%  
Test Distance: 8.000m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.20V I:0.326A P:71.10W PF:0.985 Freq:50.00Hz Lamp Flux:6720.05x1 lm		
NAME: JSJ-M(20°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

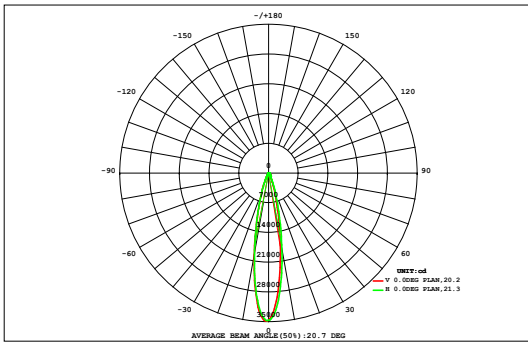

DATA OF LAMP		Eff: 94.52lm/W	
MODEL		Imax (cd)	34920
NOMINAL POWER (W)		AVAILABILITY (%)	78.4
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	5268
NOMINAL FLUX (lm)	6720.05	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	6720
TEST VOLTAGE (V)	221.2	θ @50% (H, V)	20, 21 DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT: lm		Φ t	Φ a	
	1.17	1.50	1.94	2.50	3.15	3.78	4.41	4.98	5.37	5.43	5.17	4.67	4.06	3.40	2.70	2.10	1.61			1.25
27	1.17	1.50	1.94	2.50	3.15	3.78	4.41	4.98	5.37	5.43	5.17	4.67	4.06	3.40	2.70	2.10	1.61	1.25	59.2	0.00
24	1.45	1.93	2.58	3.45	4.52	5.69	6.82	7.81	8.52	8.64	8.15	7.29	6.20	4.98	3.80	2.84	2.11	1.57	88.4	7.70
21	1.80	2.49	3.43	4.76	6.48	8.48	10.4	12.1	13.6	13.9	12.9	11.4	9.42	7.27	5.36	3.84	2.76	1.97	132	77.2
18	2.22	3.17	4.55	6.48	9.05	12.4	15.9	18.8	21.4	21.9	20.2	17.6	14.1	10.4	7.43	5.19	3.56	2.45	197	155
15	2.65	3.93	5.86	8.58	12.3	17.4	23.5	28.4	32.7	33.6	30.8	26.4	20.2	14.5	10.1	6.80	4.49	2.97	285	250
12	3.07	4.71	7.23	11.0	16.4	23.4	32.7	41.4	47.7	49.3	45.3	37.3	27.5	19.5	13.2	8.50	5.43	3.45	397	367
9	3.43	5.40	8.44	13.3	20.6	30.4	42.4	56.0	65.0	67.3	61.5	48.9	36.1	24.7	16.0	10.0	6.26	3.91	520	492
6	3.76	5.96	9.39	14.9	23.3	35.9	51.9	68.2	80.8	83.7	75.2	59.9	42.6	28.1	18.0	11.4	7.12	4.44	625	600
3	3.96	6.29	10.1	16.2	25.4	38.9	56.4	75.3	89.6	93.0	83.2	65.7	47.3	31.8	20.4	12.8	7.86	4.84	689	666
0	4.05	6.45	10.4	17.0	26.8	41.3	59.5	77.7	90.5	92.7	84.4	68.3	49.7	33.3	21.2	13.2	8.05	4.94	709	686
-3	4.01	6.41	10.4	16.7	25.8	38.1	53.3	69.3	79.8	82.0	74.9	60.2	44.4	30.6	19.9	12.5	7.65	4.72	641	617
-6	3.77	5.88	9.16	14.2	21.2	31.3	44.0	55.0	63.9	65.5	59.4	49.4	36.2	24.9	16.7	10.8	6.81	4.29	523	497
-9	3.29	4.99	7.53	11.4	17.1	24.7	32.6	40.8	46.6	47.8	43.8	36.3	28.2	19.8	13.3	8.73	5.70	3.69	396	367
-12	2.76	4.07	6.07	8.96	13.1	17.8	22.8	28.6	31.7	32.4	30.5	25.1	20.0	15.0	10.3	6.90	4.60	3.07	284	249
-15	2.27	3.28	4.74	6.77	9.32	12.2	15.7	19.1	20.7	21.0	20.2	17.0	13.6	10.5	7.63	5.32	3.64	2.50	195	154
-18	1.86	2.60	3.62	4.93	6.51	8.32	10.4	12.4	13.2	13.4	13.0	11.2	9.10	7.19	5.46	3.99	2.85	2.02	132	76.2
-21	1.51	2.03	2.71	3.53	4.51	5.65	6.87	7.85	8.32	8.42	8.14	7.27	6.08	4.90	3.84	2.94	2.20	1.62	88.4	6.45
-24	1.22	1.57	2.01	2.53	3.13	3.82	4.52	5.04	5.32	5.37	5.19	4.73	4.05	3.34	2.71	2.15	1.68	1.30	59.7	0.00
-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27				
Φ t	48.3	72.7	110	167	249	360	494	629	724	745	682	559	419	294	198	130	84.4	55.0	6020	---
Φ a	0.00	0.00	37.8	119	210	327	467	603	702	724	657	533	389	259	156	74.5	8.19	0.00	---	5268


one-half-peak spread: U:11.0,D:10.5 , L:10.3,R:10.1 NEMA Beam Type: Type 3

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: SENPU  
 Test Date: 2023-07-01

γ Range: 0 - 100DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 61%  
 Test Distance: 8.000m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:221.20V I:0.326A P:71.10W PF:0.985 Freq:50.00Hz Lamp Flux:6720.05x1 lm		
NAME: JSJ-M(20°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

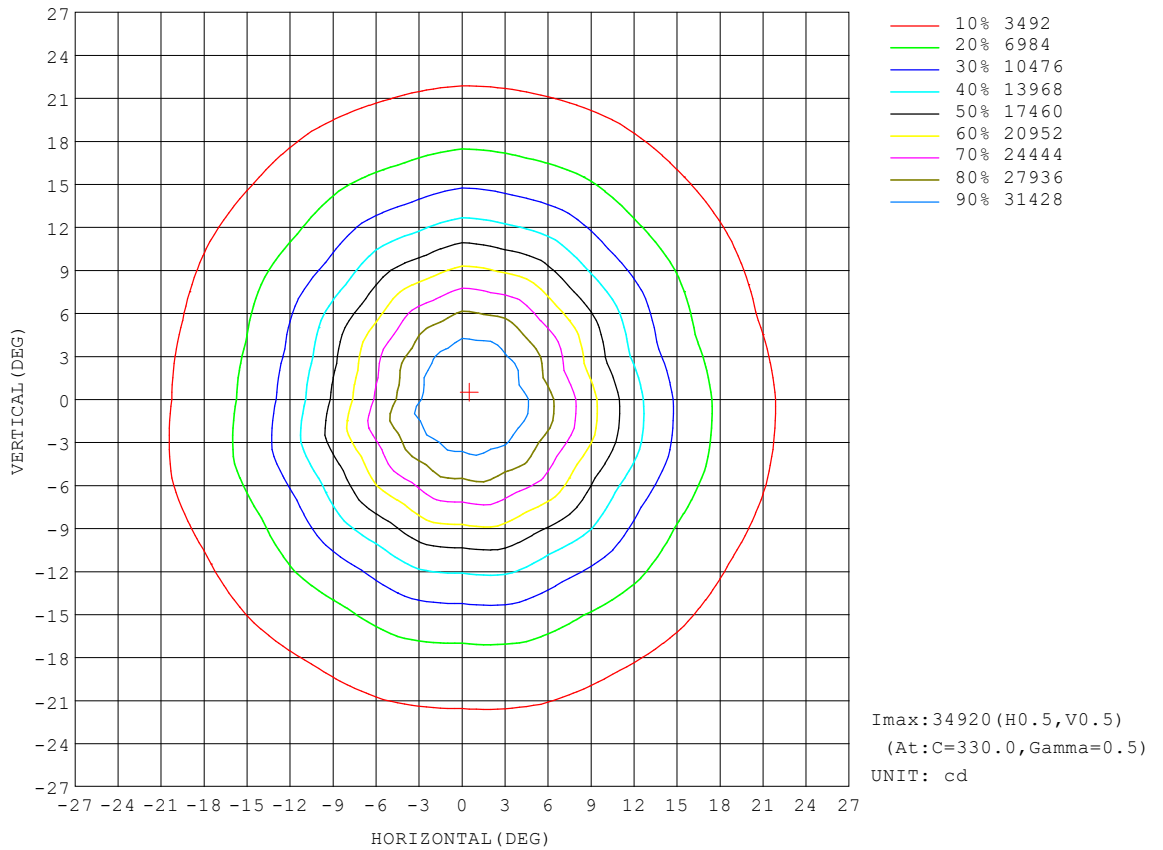


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: SENPU  
 Test Date: 2023-07-01

γ Range: 0 - 100DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 61%  
 Test Distance: 8.000m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM


Test:U:221.20V I:0.326A P:71.10W PF:0.985 Freq:50.00Hz Lamp Flux:6720.05x1 lm		
NAME: JSJ-M(20°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

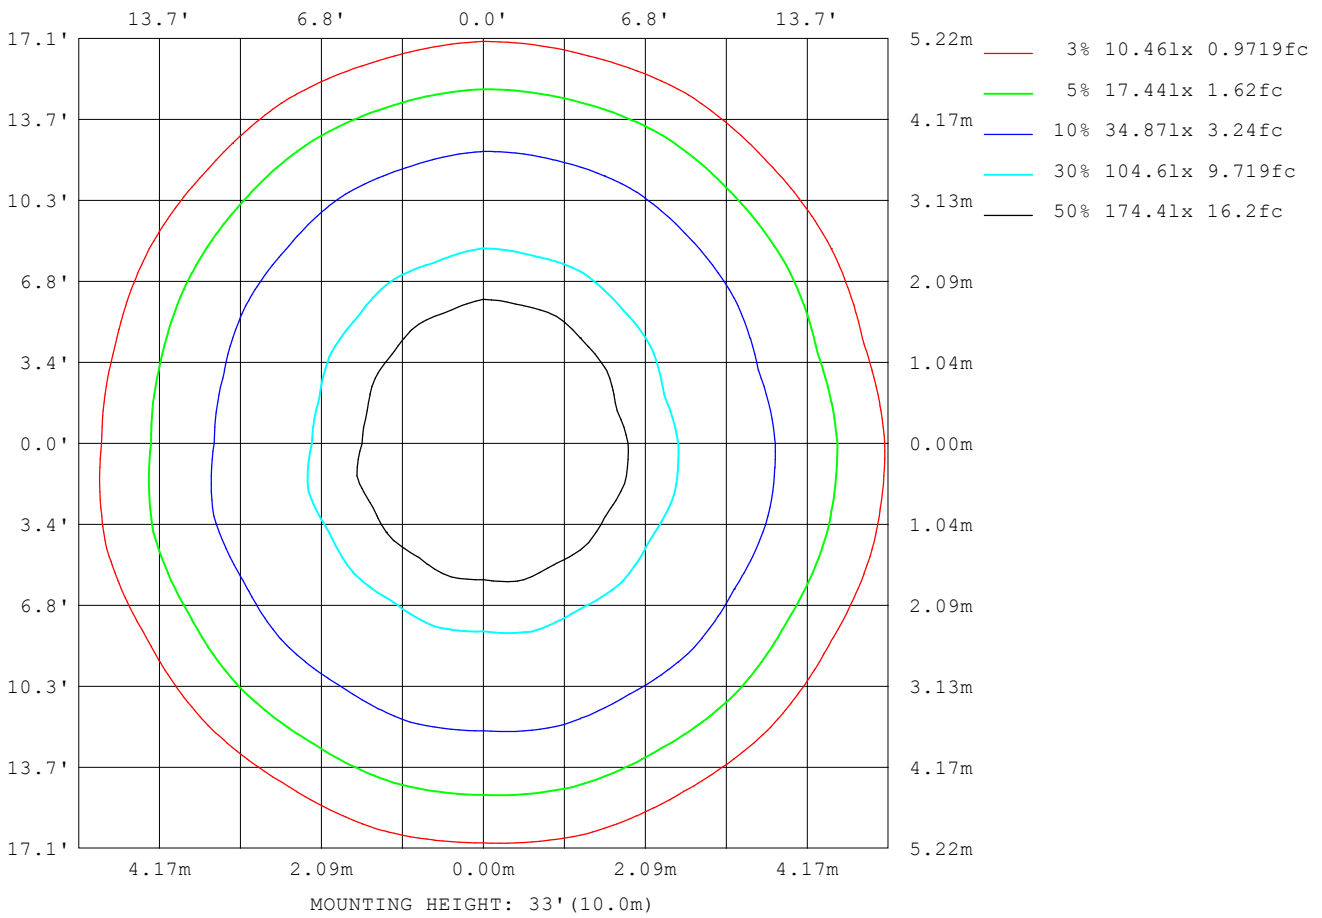

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:SENPU  
 Test Date:2023-07-01

γ Range: 0 - 100DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:61%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

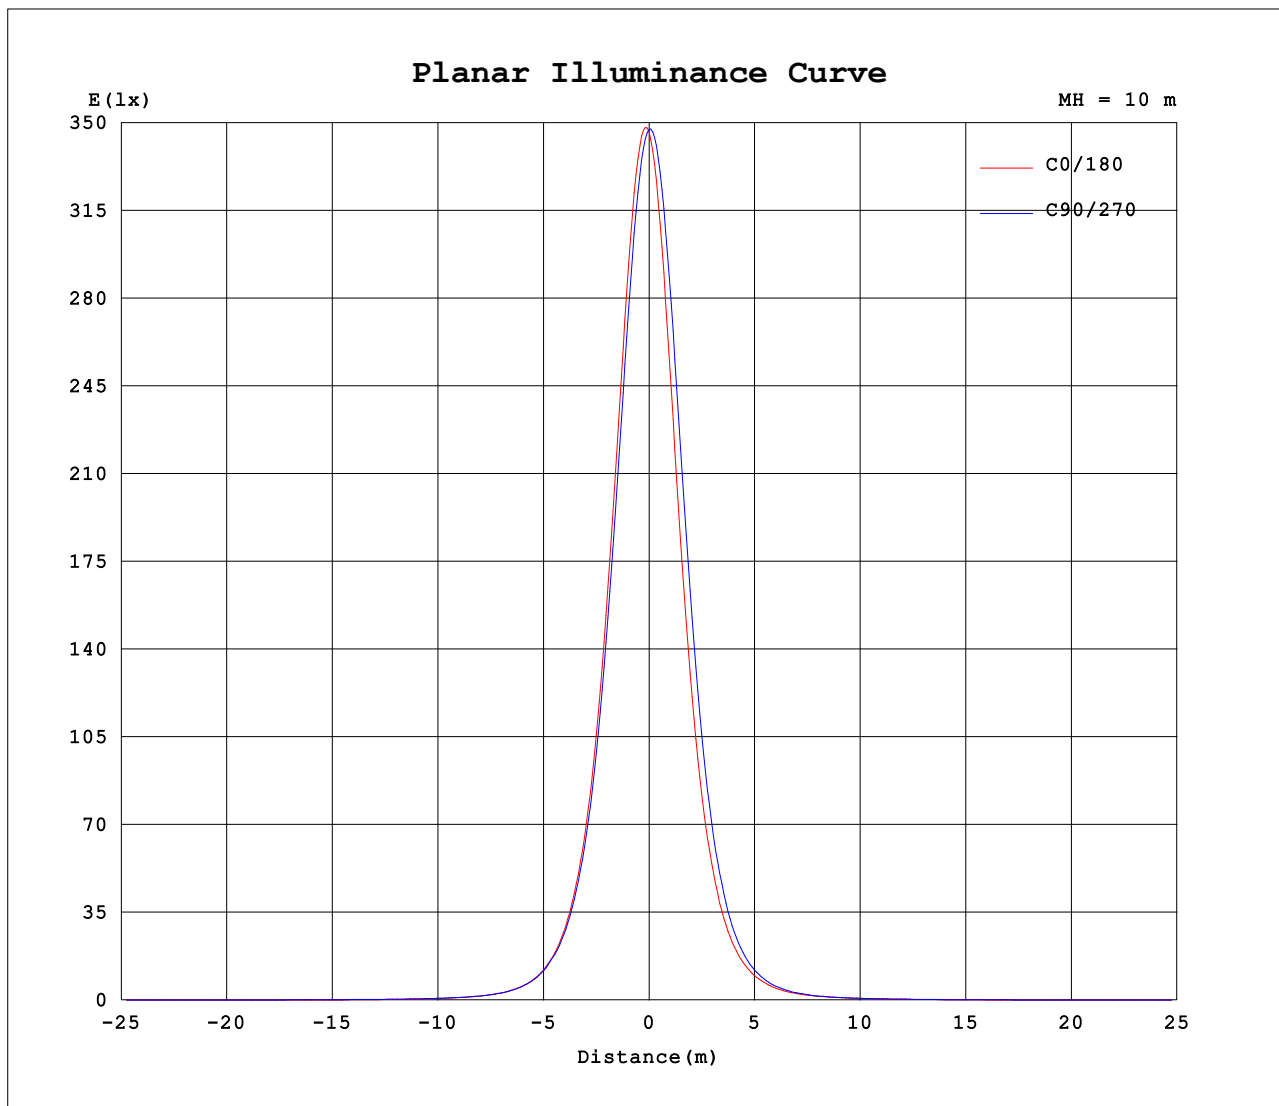


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: SENPU  
 Test Date: 2023-07-01

γ Range: 0 - 100DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 61%  
 Test Distance: 8.000m [K=1.0000]  
 Remarks:

**AAI Figure**

Test:U:221.20V I:0.326A P:71.10W PF:0.985 Freq:50.00Hz Lamp Flux:6720.05x1 lm		
NAME: JSJ-M(20°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

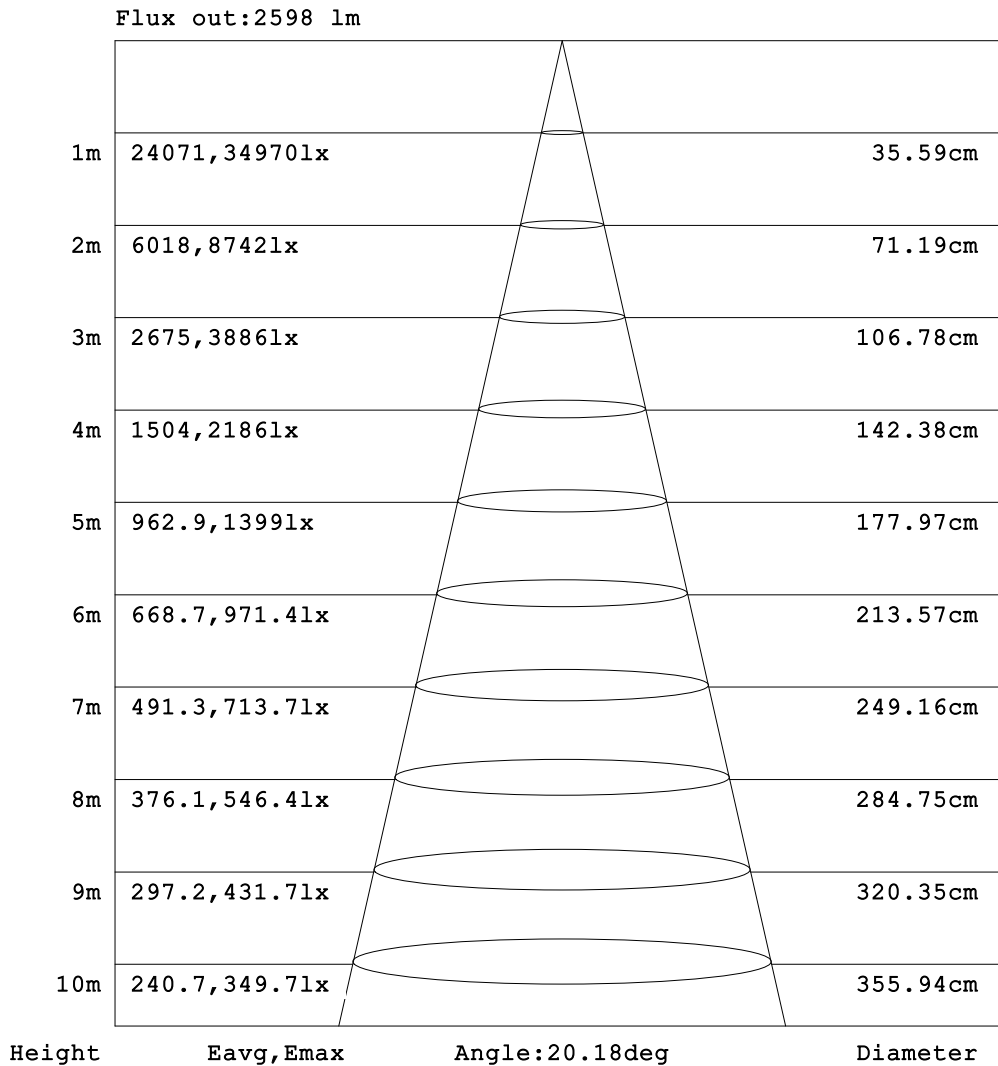

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:SENPU  
 Test Date:2023-07-01

γ Range: 0 - 100DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:61%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.20V I:0.326A P:71.10W PF:0.985 Freq:50.00Hz Lamp Flux:6720.05x1 lm		
NAME: JSJ-M(20°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.01	0.01	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.01	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.01	0.02	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.01	0.02	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.01	0.02	0.04	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.01	0.03	0.04	0.06	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.01	0.03	0.04	0.06	0.07	0.07	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.01	0.03	0.04	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.08	0.08	0.09	0.10	0.10	0.11	0.12
-90	0.01	0.03	0.04	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.07	0.07
-80	0.01	0.03	0.04	0.06	0.06	0.06	0.06	0.06	0.06	0.07	0.08	0.10	0.12	0.56	1.09	1.61	1.66	1.66	1.65
-70	0.01	0.03	0.04	0.06	0.06	0.07	0.09	0.11	0.14	0.42	1.14	2.26	3.51	4.19	4.54	4.81	4.91	4.92	4.88
-60	0.01	0.03	0.04	0.05	0.08	0.11	0.12	0.45	1.41	2.80	5.07	6.66	7.43	8.01	8.58	9.06	9.37	9.53	9.56
-50	0.01	0.03	0.04	0.07	0.11	0.15	0.78	1.78	4.28	6.93	9.20	10.6	11.7	12.8	14.0	15.1	16.0	16.6	16.9
-40	0.01	0.03	0.04	0.09	0.12	0.65	1.86	4.44	8.32	11.1	13.2	15.5	17.9	20.5	23.6	26.7	29.7	31.6	32.2
-30	0.01	0.03	0.05	0.11	0.20	1.24	3.43	7.39	11.6	14.4	17.6	21.9	27.9	36.6	49.0	64.3	82.4	96.5	101
-20	0.01	0.03	0.05	0.11	0.44	1.76	5.05	9.75	14.1	17.8	23.1	31.7	47.1	76.0	126	202	299	409	445
-10	0.01	0.02	0.05	0.11	0.60	2.12	5.94	11.2	15.5	20.4	28.3	44.6	77.6	145	281	545	1015	1518	1817
0	0.01	0.02	0.05	0.11	0.61	2.08	6.01	11.3	15.9	21.0	29.6	47.9	86.9	172	363	777	1574	2704	3462
10	0.01	0.02	0.05	0.11	0.54	1.95	5.67	10.7	15.3	19.9	27.2	41.4	71.6	134	268	533	951	1562	1941
20	0.01	0.02	0.05	0.11	0.32	1.57	4.46	8.70	13.6	17.4	22.5	30.8	46.4	73.4	119	199	304	401	466
30	0.01	0.02	0.04	0.10	0.13	1.04	2.62	6.67	11.0	14.4	17.6	21.6	27.2	35.6	48.1	64.0	80.0	94.0	102
40	0.01	0.02	0.03	0.08	0.12	0.40	1.54	3.86	7.59	11.1	13.1	15.3	17.7	20.5	23.5	26.4	29.0	31.2	32.2
50	0.01	0.02	0.03	0.05	0.10	0.12	0.59	1.53	3.74	6.52	8.93	10.4	11.7	12.9	14.0	14.9	15.6	16.2	16.4
60	0.01	0.02	0.03	0.04	0.06	0.09	0.10	0.29	1.07	2.29	3.99	6.00	7.27	7.98	8.48	8.90	9.25	9.49	9.61
70	0.01	0.01	0.03	0.03	0.03	0.04	0.06	0.09	0.10	0.17	0.79	1.79	3.05	3.86	4.25	4.50	4.82	5.09	5.29
80	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.05	0.07	0.08	0.08	0.42	0.87	1.37	1.60	1.78	1.93
90	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.01
100	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
110	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:SENPU  
 Test Date:2023-07-01

γ Range: 0 - 100DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:61%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.20V I:0.326A P:71.10W PF:0.985 Freq:50.00Hz Lamp Flux:6720.05x1 lm		
NAME: JSJ-M(20°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: x10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07	0.07
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07	0.07	0.07
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07	0.07	0.07	0.07	0.07
-100	0.12	0.13	0.13	0.13	0.12	0.11	0.10	0.09	0.09	0.08	0.07	0.06	0.07	0.07	0.07	0.07	0.07	0.07
-90	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07
-80	1.53	1.40	1.22	0.78	0.39	0.10	0.09	0.09	0.08	0.08	0.08	0.07	0.07	0.07	0.07	0.07	0.07	0.07
-70	4.94	4.93	4.73	3.86	2.85	1.80	1.03	0.44	0.09	0.09	0.09	0.09	0.09	0.07	0.07	0.07	0.07	0.07
-60	9.54	9.39	9.08	8.57	7.93	6.51	4.50	2.30	1.28	0.59	0.13	0.09	0.09	0.09	0.08	0.07	0.07	0.07
-50	16.6	16.0	15.2	14.2	13.0	11.7	9.93	6.83	3.81	1.90	0.91	0.22	0.09	0.09	0.09	0.07	0.07	0.07
-40	31.8	30.0	27.2	24.2	21.2	18.4	15.5	12.0	8.02	4.19	1.89	0.93	0.14	0.09	0.09	0.08	0.07	0.07
-30	98.4	85.3	67.3	51.2	38.5	29.2	22.5	17.3	12.5	7.62	3.42	1.55	0.54	0.09	0.09	0.09	0.07	0.07
-20	429	325	222	139	82.5	50.3	33.1	23.1	16.4	10.6	5.42	2.16	0.96	0.10	0.09	0.09	0.07	0.07
-10	1644	1162	635	326	163	84.8	47.5	28.5	19.2	12.7	6.95	2.62	1.20	0.16	0.10	0.09	0.07	0.07
0	3078	1960	1005	469	216	102	53.0	30.6	20.0	13.2	7.22	2.72	1.26	0.20	0.10	0.10	0.07	0.07
10	1725	1122	632	314	152	78.0	43.6	27.2	18.4	12.1	6.50	2.48	1.13	0.13	0.10	0.09	0.07	0.07
20	426	336	222	133	80.3	50.0	32.2	22.2	15.6	9.64	4.60	1.95	0.84	0.09	0.09	0.09	0.07	0.07
30	96.5	83.6	67.6	51.0	37.6	28.6	22.2	17.1	12.1	7.08	3.04	1.33	0.38	0.09	0.09	0.08	0.07	0.07
40	31.4	29.5	27.1	24.3	21.2	18.3	15.3	11.6	7.80	3.86	1.73	0.76	0.10	0.08	0.08	0.07	0.07	0.07
50	16.3	15.8	15.1	14.3	13.2	11.6	9.50	6.26	3.47	1.72	0.82	0.16	0.08	0.08	0.07	0.06	0.06	0.07
60	9.53	9.31	8.97	8.51	7.92	6.36	4.15	1.99	1.12	0.47	0.10	0.07	0.07	0.07	0.05	0.05	0.06	0.07
70	5.11	4.87	4.47	3.65	2.70	1.66	0.87	0.31	0.07	0.07	0.07	0.06	0.05	0.04	0.04	0.05	0.06	0.07
80	1.68	1.40	1.09	0.67	0.31	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.03	0.03	0.03	0.04	0.06	0.07
90	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.04	0.05	0.07
100	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.05	0.07
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.02	0.02	0.04	0.05	0.07
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.04	0.05	0.07
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.04	0.06	0.07
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.06	0.07
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.06	0.07
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.07	0.07
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:SENPU  
 Test Date:2023-07-01

γ Range: 0 - 100DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:61%  
 Test Distance:8.000m [K=1.0000]  
 Remarks: