

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2201.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		2.0 degrees horizontal
Beam Spread	At 10% of Imax	59.3V x 58.5H
	At 50% of Imax	39.5V x 39.2H
	At 90% of Imax	21.2V x 22.0H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	875.9 lumens per klm.
	To 50% of Imax	633.3 lumens per klm.
	To 90% of Imax	232.1 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.0 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: SENPU
Test Date: 2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.444
Humidity: 61%
Test Distance: 8.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.20V I:0.330A P:72.00W PF:0.987 Freq:50.00Hz		
Lamp Flux:6466.24x1 lm		
NAME: JSJ-W(43.2°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

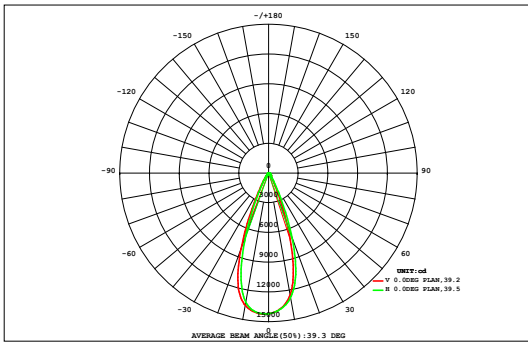

DATA OF LAMP		Eff:89.81lm/W	
MODEL		Imax (cd)	14236
NOMINAL POWER (W)		AVAILABILITY (%)	87.7
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	5668
NOMINAL FLUX (lm)	6466.24	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	6466
TEST VOLTAGE (V)	221.2	θ @50% (H,V)	39,39DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm		Φ t	Φ a	
	0.50	0.66	0.85	1.08	1.33	1.59	1.84	2.06	2.23	2.27	2.18	2.01	1.78	1.51	1.24	0.98	0.74	0.50	25.3	0.00
45	0.62	0.83	1.09	1.43	1.85	2.33	2.83	3.30	3.67	3.76	3.53	3.16	2.68	2.15	1.68	1.28	0.95	0.67	37.8	0.00
40	0.74	1.02	1.40	1.93	2.67	3.68	4.80	5.91	6.84	7.05	6.46	5.52	4.39	3.24	2.34	1.68	1.19	0.83	61.7	0.00
35	0.86	1.24	1.79	2.65	4.00	6.10	8.99	12.3	15.1	15.8	14.1	11.0	7.72	5.09	3.36	2.22	1.49	0.99	115	59.1
30	0.98	1.47	2.29	3.71	6.16	10.8	18.6	27.2	34.4	36.3	31.9	23.9	14.9	8.46	4.93	2.98	1.81	1.15	232	196
25	1.10	1.73	2.90	5.14	9.87	19.8	35.9	52.6	63.8	66.5	60.2	45.8	28.0	14.6	7.27	3.89	2.17	1.29	423	392
20	1.21	1.98	3.52	6.87	15.3	33.0	56.7	78.3	89.5	91.9	85.9	69.3	46.1	23.4	10.3	4.88	2.55	1.44	622	596
15	1.30	2.20	4.09	8.63	20.9	45.7	74.4	93.6	103	104	99.7	86.3	60.8	32.0	13.6	5.96	2.98	1.60	761	737
10	1.35	2.33	4.50	10.0	25.0	53.1	82.0	99.2	106	108	104	93.1	70.2	39.5	16.9	6.96	3.30	1.71	827	805
5	1.36	2.37	4.63	10.5	26.7	56.1	83.9	99.1	105	107	104	94.5	73.2	41.7	17.6	7.18	3.37	1.73	840	818
0	1.33	2.30	4.41	9.69	24.0	49.8	76.0	92.9	100	102	98.1	87.0	64.9	36.0	15.2	6.51	3.17	1.67	775	752
-5	1.26	2.09	3.78	7.47	16.9	36.2	61.0	78.6	88.4	90.4	85.3	72.4	49.2	25.5	11.3	5.35	2.80	1.54	639	613
-10	1.14	1.78	2.99	5.34	10.7	22.3	39.2	55.7	66.1	68.4	62.4	48.7	31.1	15.9	7.72	4.11	2.31	1.37	447	418
-15	1.00	1.49	2.32	3.82	6.58	11.8	20.1	30.4	37.3	39.0	34.9	25.5	16.2	9.18	5.18	3.06	1.86	1.19	251	214
-20	0.86	1.23	1.80	2.71	4.14	6.25	9.41	13.4	16.2	17.0	15.3	11.6	8.02	5.35	3.49	2.25	1.49	1.00	122	69.2
-25	0.74	1.02	1.40	1.94	2.68	3.65	4.88	6.16	6.97	7.23	6.83	5.69	4.41	3.28	2.35	1.67	1.19	0.84	62.9	0.00
-30	0.62	0.83	1.10	1.43	1.82	2.30	2.84	3.34	3.64	3.74	3.61	3.20	2.65	2.12	1.65	1.27	0.95	0.68	37.8	0.00
-35	0.52	0.68	0.87	1.08	1.31	1.56	1.81	2.03	2.18	2.22	2.15	1.98	1.73	1.47	1.21	0.98	0.76	0.53	25.1	0.00
-40	0.45	0.58	0.75	0.94	1.13	1.35	1.58	1.81	1.96	2.00	1.93	1.76	1.51	1.26	1.01	0.77	0.54	0.38	15.5	0.00
-45	0.40	0.52	0.68	0.86	1.04	1.24	1.46	1.68	1.82	1.86	1.79	1.62	1.37	1.12	0.87	0.63	0.44	0.31	10.0	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	17.5	27.2	45.7	85.4	182	366	585	756	851	872	820	691	488	271	127	63.2	35.1	20.7	6304	---
Φ a	0.00	0.00	0.00	24.6	139	331	554	727	823	845	792	661	455	233	79.6	3.09	0.00	0.00	---	5668


one-half-peak spread: U:21.4,D:18.2 , L:20.1,R:19.2 NEMA Beam Type: Type 4

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:221.20V I:0.330A P:72.00W PF:0.987 Freq:50.00Hz Lamp Flux:6466.24x1 lm		
NAME: JSJ-W(43.2°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

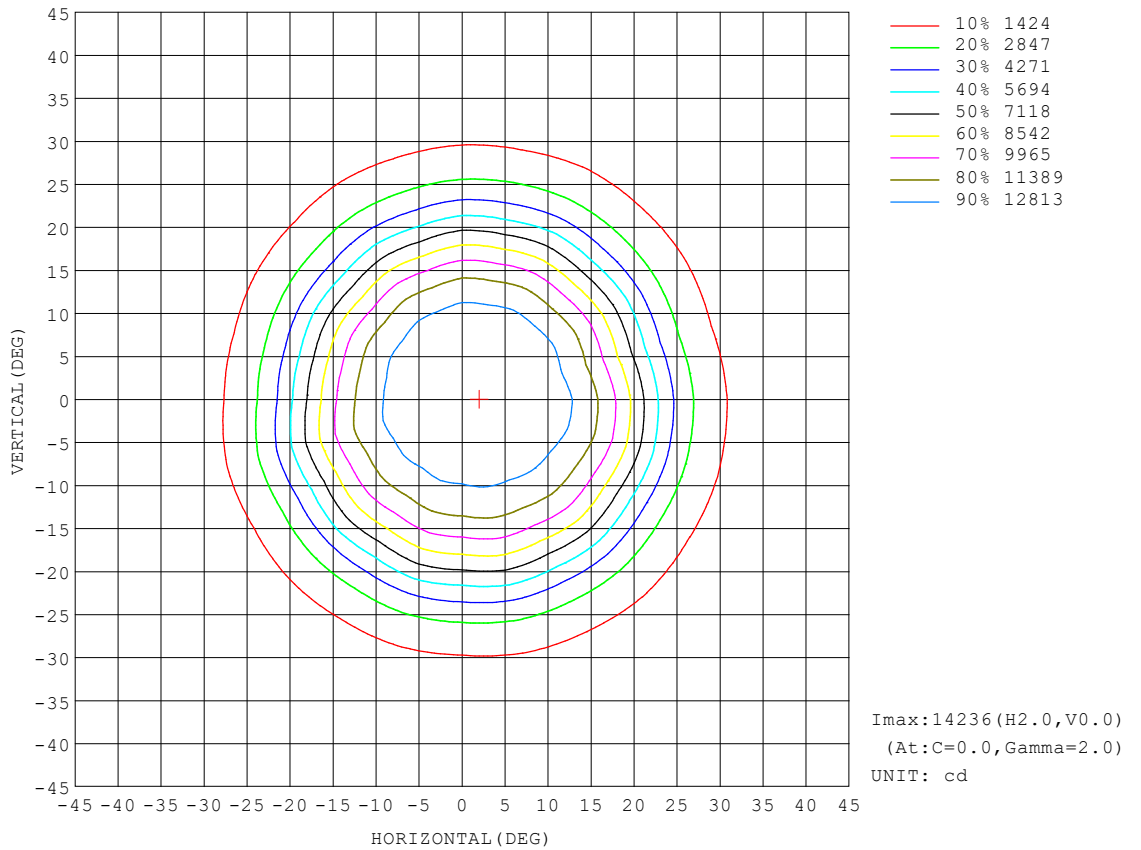


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:221.20V I:0.330A P:72.00W PF:0.987 Freq:50.00Hz Lamp Flux:6466.24x1 lm		
NAME: JSJ-W(43.2°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

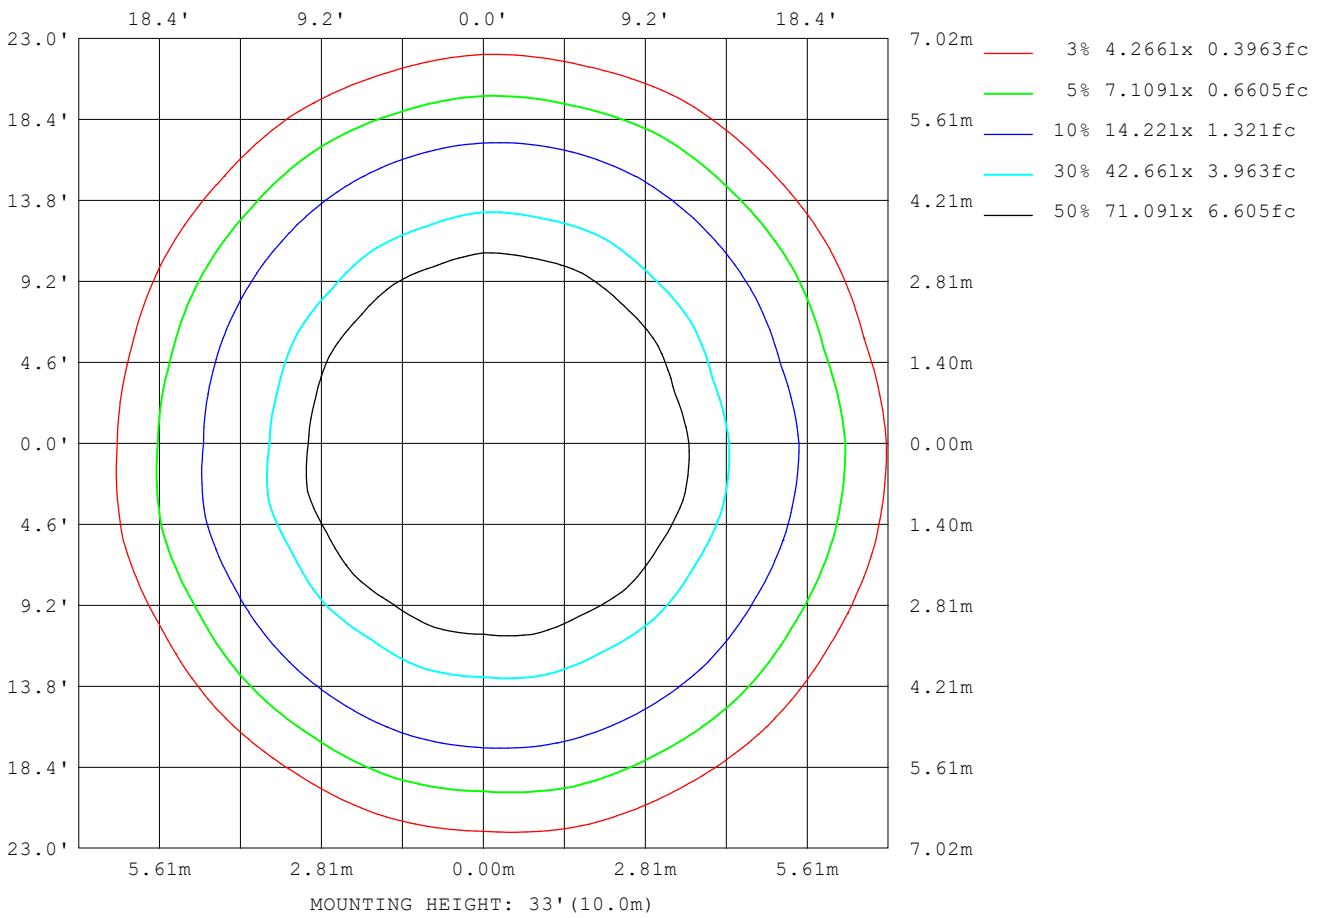

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

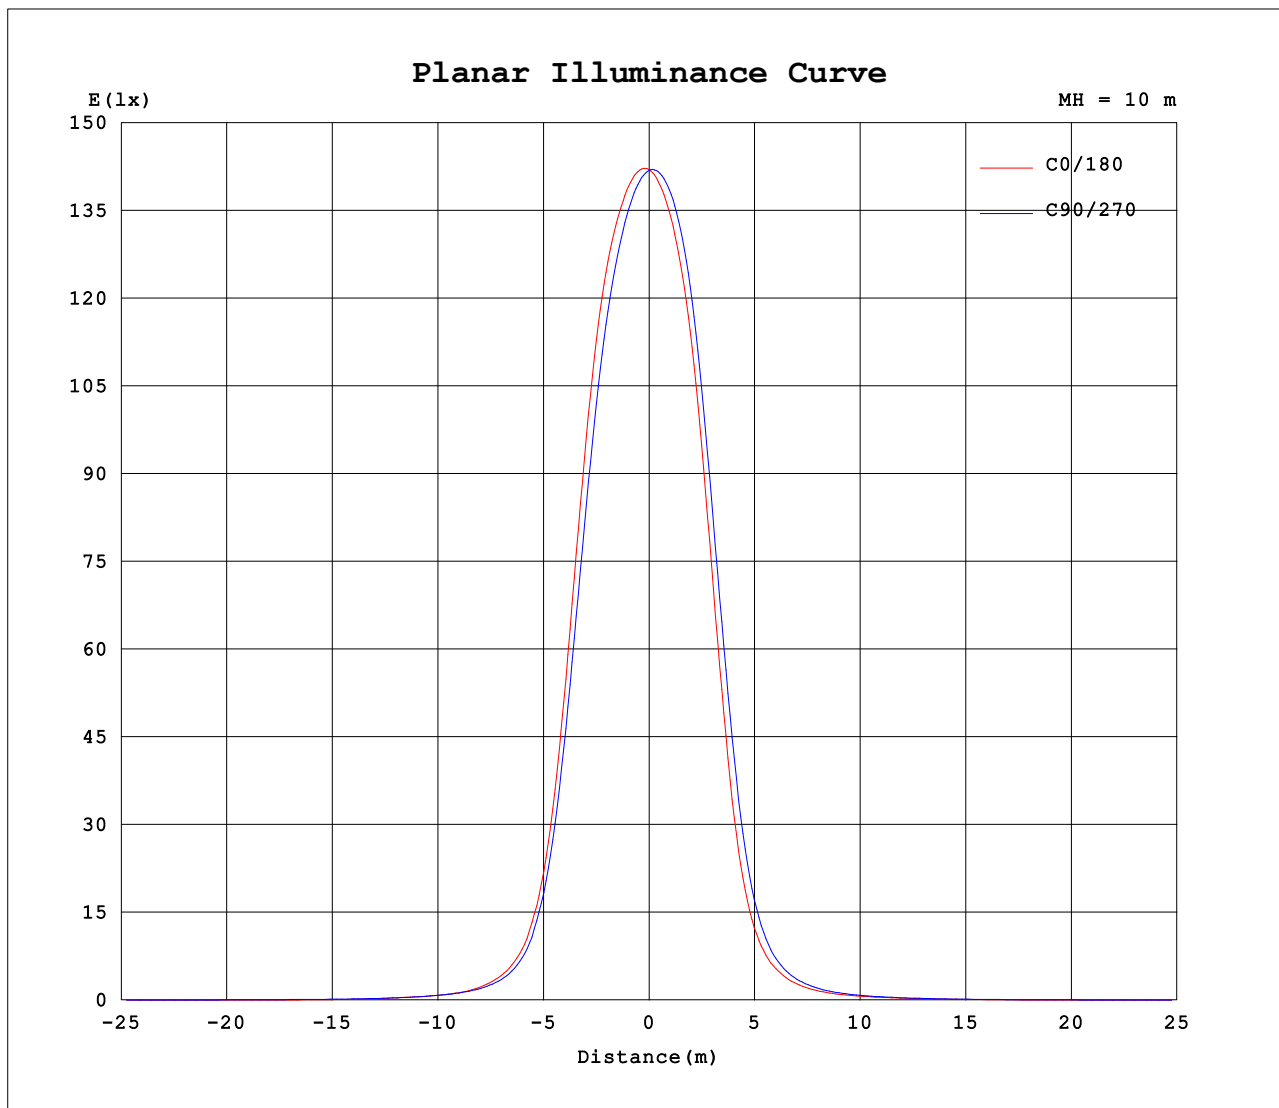


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: SENPU
 Test Date: 2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity: 61%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:221.20V I:0.330A P:72.00W PF:0.987 Freq:50.00Hz Lamp Flux:6466.24x1 lm		
NAME: JSJ-W(43.2°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

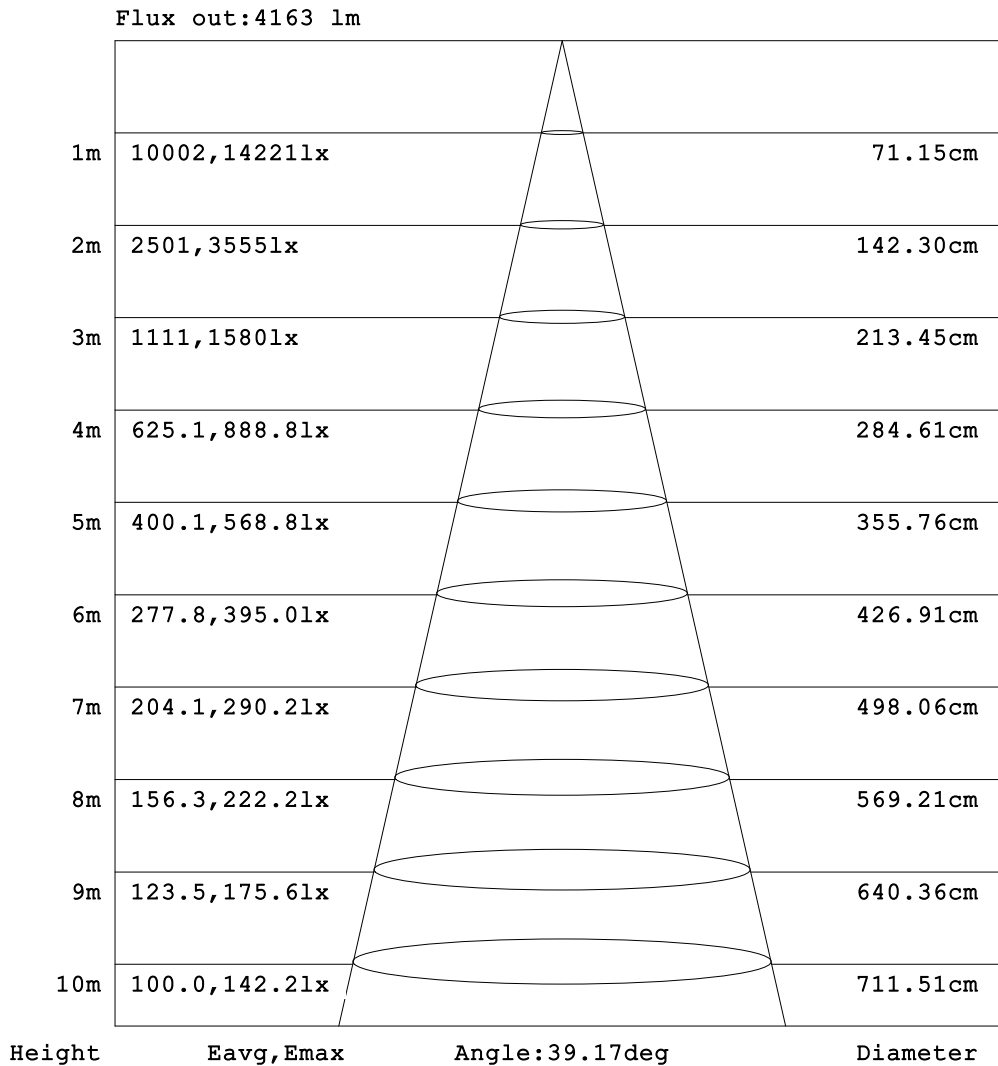

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.20V I:0.330A P:72.00W PF:0.987 Freq:50.00Hz Lamp Flux:6466.24x1 lm		
NAME: JSJ-W(43.2°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.02	0.02	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.02	0.02	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.02	0.03	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.02	0.03	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.02	0.03	0.05	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.02	0.03	0.05	0.08	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.02	0.04	0.06	0.08	0.08	0.08	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.02	0.04	0.06	0.08	0.08	0.07	0.07	0.08	0.08	0.08	0.09	0.09	0.10	0.10	0.11	0.12	0.13	0.13	0.13
-90	0.02	0.04	0.05	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.08	0.08	0.08	0.09
-80	0.02	0.03	0.05	0.07	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.11	0.11	0.55	1.08	1.64	1.71	1.74	1.76
-70	0.02	0.03	0.06	0.08	0.08	0.09	0.10	0.11	0.12	0.25	0.81	1.75	2.75	3.31	3.59	3.81	3.96	4.07	4.12
-60	0.02	0.03	0.06	0.08	0.10	0.12	0.12	0.29	0.94	2.13	3.84	4.95	5.68	6.25	6.80	7.29	7.70	8.02	8.20
-50	0.02	0.03	0.06	0.08	0.12	0.13	0.52	1.23	3.09	5.48	7.23	8.55	9.85	11.1	12.4	13.7	14.7	15.5	15.9
-40	0.02	0.04	0.06	0.09	0.12	0.42	1.30	3.43	6.64	9.05	11.2	13.8	16.7	19.9	23.6	27.7	31.7	34.9	36.5
-30	0.02	0.04	0.05	0.10	0.13	0.88	2.39	6.13	9.51	12.4	16.1	21.1	28.5	39.4	54.6	74.7	101	125	136
-20	0.02	0.04	0.05	0.10	0.26	1.26	3.89	8.34	12.0	16.1	22.3	32.6	50.9	86.0	159	295	472	647	697
-10	0.02	0.03	0.05	0.10	0.40	1.51	4.78	9.44	13.5	19.0	28.3	47.7	86.9	187	423	774	1078	1220	1277
0	0.02	0.03	0.05	0.10	0.41	1.52	4.80	9.63	13.9	19.6	29.6	51.1	98.5	228	545	964	1251	1374	1420
10	0.02	0.03	0.05	0.10	0.35	1.41	4.45	9.15	13.2	18.4	27.2	44.1	78.9	165	380	733	1044	1252	1324
20	0.02	0.03	0.05	0.10	0.18	1.12	3.30	7.68	11.5	15.7	21.8	31.9	50.4	82.1	143	267	435	577	680
30	0.02	0.03	0.04	0.09	0.11	0.69	1.90	5.45	9.16	12.4	16.2	21.2	28.3	38.7	54.2	74.4	96.4	118	132
40	0.02	0.03	0.04	0.07	0.10	0.25	1.08	2.94	6.35	8.86	11.0	13.6	16.6	20.1	24.1	28.1	31.8	35.3	37.3
50	0.02	0.02	0.04	0.05	0.09	0.10	0.37	1.07	2.70	5.12	6.99	8.29	9.68	11.1	12.5	13.7	14.8	15.8	16.3
60	0.02	0.02	0.04	0.04	0.06	0.08	0.10	0.18	0.72	1.65	3.23	4.64	5.53	6.16	6.67	7.11	7.51	7.83	8.02
70	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.08	0.09	0.11	0.57	1.45	2.51	3.11	3.39	3.59	3.74	3.86	3.94
80	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.05	0.06	0.07	0.08	0.08	0.42	0.85	1.32	1.48	1.59	1.68
90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.03	0.02	0.01
100	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
110	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.02	0.02	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.02	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.20V I:0.330A P:72.00W PF:0.987 Freq:50.00Hz Lamp Flux:6466.24x1 lm		
NAME: JSJ-W(43.2°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: x10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.08	0.08
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.08	0.08
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.08	0.08
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.08	0.08
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.08	0.08
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.08	0.08	0.08
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.09	0.08	0.08	0.08
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.09	0.09	0.08	0.08	0.08	0.08
-100	0.14	0.14	0.14	0.13	0.13	0.12	0.12	0.11	0.10	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.08
-90	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08
-80	1.70	1.62	1.50	0.97	0.48	0.10	0.10	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.08
-70	4.14	4.10	3.96	3.50	2.86	1.97	1.12	0.52	0.19	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08
-60	8.20	8.06	7.76	7.31	6.76	5.76	4.24	2.42	1.26	0.66	0.20	0.09	0.09	0.09	0.09	0.08	0.08	0.08
-50	15.9	15.5	14.7	13.6	12.3	11.0	9.45	7.22	4.24	1.94	0.95	0.37	0.10	0.10	0.10	0.09	0.08	0.08
-40	36.5	34.5	30.9	26.7	22.7	19.0	15.7	12.5	8.74	4.71	1.97	0.99	0.30	0.10	0.10	0.09	0.08	0.08
-30	136	118	91.5	68.1	49.9	35.1	25.5	18.8	13.9	8.77	3.91	1.59	0.68	0.10	0.10	0.10	0.09	0.08
-20	701	568	395	229	122	69.9	42.8	27.3	18.9	12.3	6.27	2.22	1.05	0.21	0.10	0.10	0.09	0.08
-10	1270	1190	964	611	290	129	66.1	36.4	22.8	15.1	7.98	2.85	1.28	0.37	0.10	0.10	0.09	0.08
0	1414	1356	1186	817	400	164	76.7	39.5	24.4	15.9	8.30	2.96	1.34	0.42	0.10	0.10	0.09	0.08
10	1305	1180	933	566	258	115	60.4	33.8	21.8	14.3	7.36	2.58	1.22	0.34	0.09	0.10	0.08	0.08
20	641	542	362	210	114	67.2	40.9	26.2	17.9	11.0	5.12	1.94	0.93	0.14	0.09	0.09	0.08	0.08
30	127	111	89.6	66.6	48.2	34.8	25.5	18.9	13.5	7.88	3.20	1.36	0.54	0.08	0.08	0.09	0.08	0.08
40	36.8	34.6	31.4	27.5	23.3	19.3	15.6	12.2	8.25	4.14	1.73	0.82	0.15	0.08	0.08	0.08	0.08	0.08
50	16.2	15.7	14.9	13.8	12.5	10.8	9.06	6.71	3.63	1.68	0.84	0.25	0.07	0.07	0.07	0.07	0.07	0.08
60	7.99	7.83	7.54	7.12	6.58	5.41	3.70	1.92	1.06	0.53	0.11	0.07	0.07	0.06	0.06	0.06	0.07	0.08
70	3.90	3.83	3.66	3.17	2.47	1.60	0.87	0.35	0.08	0.07	0.07	0.06	0.06	0.05	0.04	0.06	0.07	0.08
80	1.53	1.35	1.10	0.67	0.31	0.07	0.07	0.07	0.07	0.06	0.05	0.04	0.04	0.04	0.04	0.05	0.07	0.08
90	0.02	0.03	0.04	0.04	0.04	0.03	0.03	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.05	0.07	0.08
100	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.04	0.06	0.08
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.02	0.03	0.04	0.06	0.08
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.06	0.08
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.05	0.06	0.08
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.07	0.08
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.07	0.08
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.08
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.07	0.08
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.08	0.08

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks: