

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3301.5 cd per klm. -0.5 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	72.6V x 38.1H 41.3V x 18.2H 15.3V x 6.3H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	1000.2 lumens per klm. 814.3 lumens per klm. 422.6 lumens per klm. 69.1 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.0 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: SENPU
Test Date: 2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.444
Humidity: 61%
Test Distance: 8.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.20V I:0.325A P:71.10W PF:0.988 Freq:50.00Hz		
Lamp Flux:6016.44x1 lm		
NAME: JSJ-O(12*44°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

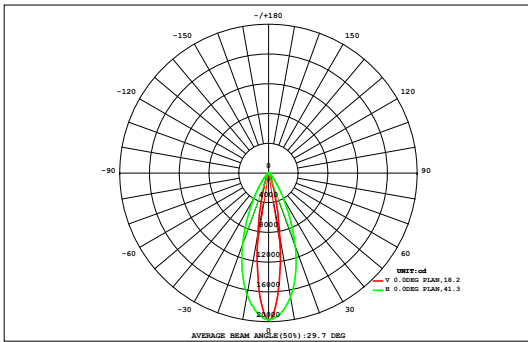

DATA OF LAMP		Eff:84.62lm/W	
MODEL		Imax (cd)	19863
NOMINAL POWER (W)		AVAILABILITY (%)	81.3
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	4894
NOMINAL FLUX (lm)	6016.44	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	6016
TEST VOLTAGE (V)	221.2	θ @50% (H,V)	18,41DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm			Φ t	Φ a
	0.01	0.01	0.04	0.19	0.50	0.85	1.06	1.23	1.44	1.43	1.20	0.91	0.57	0.27	0.06	0.01	0.01	0.01	9.81	0.00	
72	0.01	0.01	0.04	0.19	0.50	0.85	1.06	1.23	1.44	1.43	1.20	0.91	0.57	0.27	0.06	0.01	0.01	0.01	9.81	0.00	
64	0.01	0.03	0.21	0.58	1.05	1.43	1.73	2.00	2.30	2.28	1.95	1.62	1.19	0.65	0.28	0.06	0.01	0.01	17.4	0.00	
56	0.01	0.12	0.49	1.13	1.75	2.35	3.11	4.03	4.94	4.89	3.89	2.97	2.15	1.31	0.59	0.21	0.02	0.01	34.0	0.00	
48	0.03	0.26	0.89	1.70	2.47	3.64	5.74	9.56	13.5	13.3	9.13	5.45	3.43	2.16	1.06	0.39	0.08	0.01	72.9	0.00	
40	0.06	0.41	1.24	2.07	3.02	4.94	9.88	21.7	35.8	35.0	20.4	9.13	4.64	2.77	1.54	0.59	0.16	0.01	153	35.6	
32	0.10	0.56	1.45	2.23	3.47	6.46	16.4	44.9	86.1	83.9	41.8	14.9	5.95	3.18	1.86	0.78	0.23	0.02	314	231	
24	0.15	0.70	1.54	2.34	3.92	8.29	23.7	77.8	168	163	72.1	21.1	7.50	3.57	2.00	0.91	0.30	0.04	557	484	
	0.18	0.80	1.58	2.43	4.33	9.71	30.2	108	252	245	98.5	26.5	8.69	3.89	2.11	1.04	0.36	0.06	795	724	
	0.19	0.83	1.59	2.50	4.61	10.5	33.5	126	306	294	114	29.9	9.72	4.29	2.23	1.12	0.39	0.07	941	871	
	0.19	0.84	1.59	2.53	4.74	11.2	37.6	141	321	310	129	33.9	10.4	4.45	2.27	1.14	0.40	0.07	1012	944	
	0.19	0.83	1.59	2.49	4.58	10.6	34.0	121	265	257	111	30.4	9.71	4.22	2.21	1.11	0.38	0.07	857	788	
-24	0.17	0.77	1.56	2.38	4.09	8.92	26.6	84.5	178	172	78.5	24.2	8.27	3.80	2.09	1.00	0.34	0.05	597	524	
-32	0.13	0.64	1.49	2.24	3.55	6.92	17.7	48.2	90.5	88.2	45.1	16.3	6.51	3.32	1.92	0.86	0.28	0.03	334	250	
-40	0.09	0.48	1.31	2.08	3.09	5.14	10.4	23.2	37.2	36.5	22.0	9.70	4.89	2.88	1.61	0.64	0.20	0.02	161	41.5	
-48	0.04	0.31	0.97	1.78	2.58	3.77	6.02	10.3	14.0	13.8	9.86	5.75	3.59	2.31	1.16	0.43	0.11	0.01	76.8	0.00	
-56	0.02	0.16	0.56	1.25	1.88	2.50	3.37	4.53	5.34	5.28	4.40	3.24	2.31	1.48	0.68	0.24	0.04	0.01	37.3	0.00	
-64	0.01	0.04	0.26	0.69	1.18	1.53	1.89	2.23	2.46	2.45	2.19	1.80	1.30	0.74	0.33	0.09	0.01	0.01	19.2	0.00	
-72	0.01	0.01	0.07	0.27	0.59	0.92	1.16	1.34	1.47	1.47	1.32	1.02	0.64	0.32	0.09	0.02	0.01	0.01	10.7	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72				
Φ t	1.57	7.80	18.4	30.9	51.4	99.7	264	831	1784	1731	766	239	91.5	45.6	24.1	10.6	3.34	0.52	6001	---	
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	85.4	732	1704	1649	665	58.0	0.00	0.00	0.00	0.00	0.00	0.00	---	4894	


one-half-peak spread: U:20.4,D:21.1 , L:9.3,R:9.NEMA Beam Type: Type 3 x 5 (H x V)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:221.20V I:0.325A P:71.10W PF:0.988 Freq:50.00Hz Lamp Flux:6016.44x1 lm		
NAME: JSJ-O(12*44°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

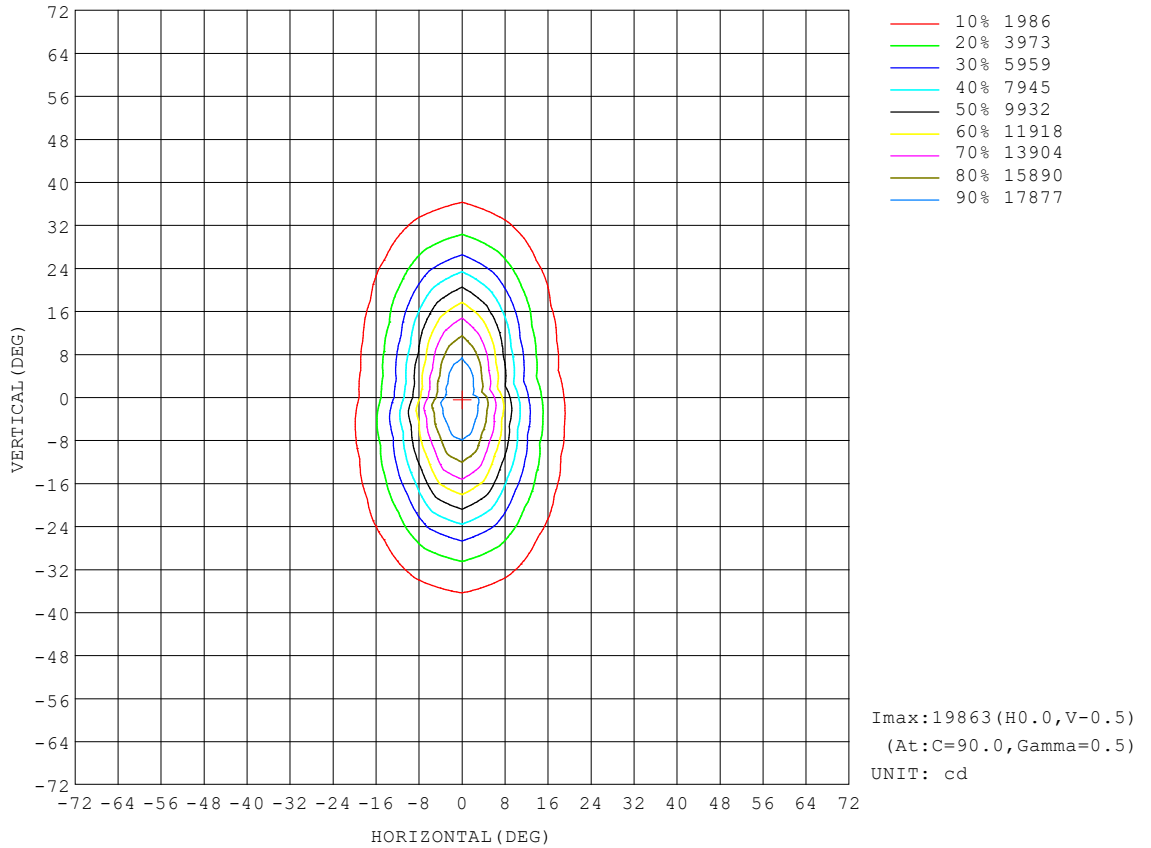


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:221.20V I:0.325A P:71.10W PF:0.988 Freq:50.00Hz		
Lamp Flux:6016.44x1 lm		
NAME: JSJ-O(12*44°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

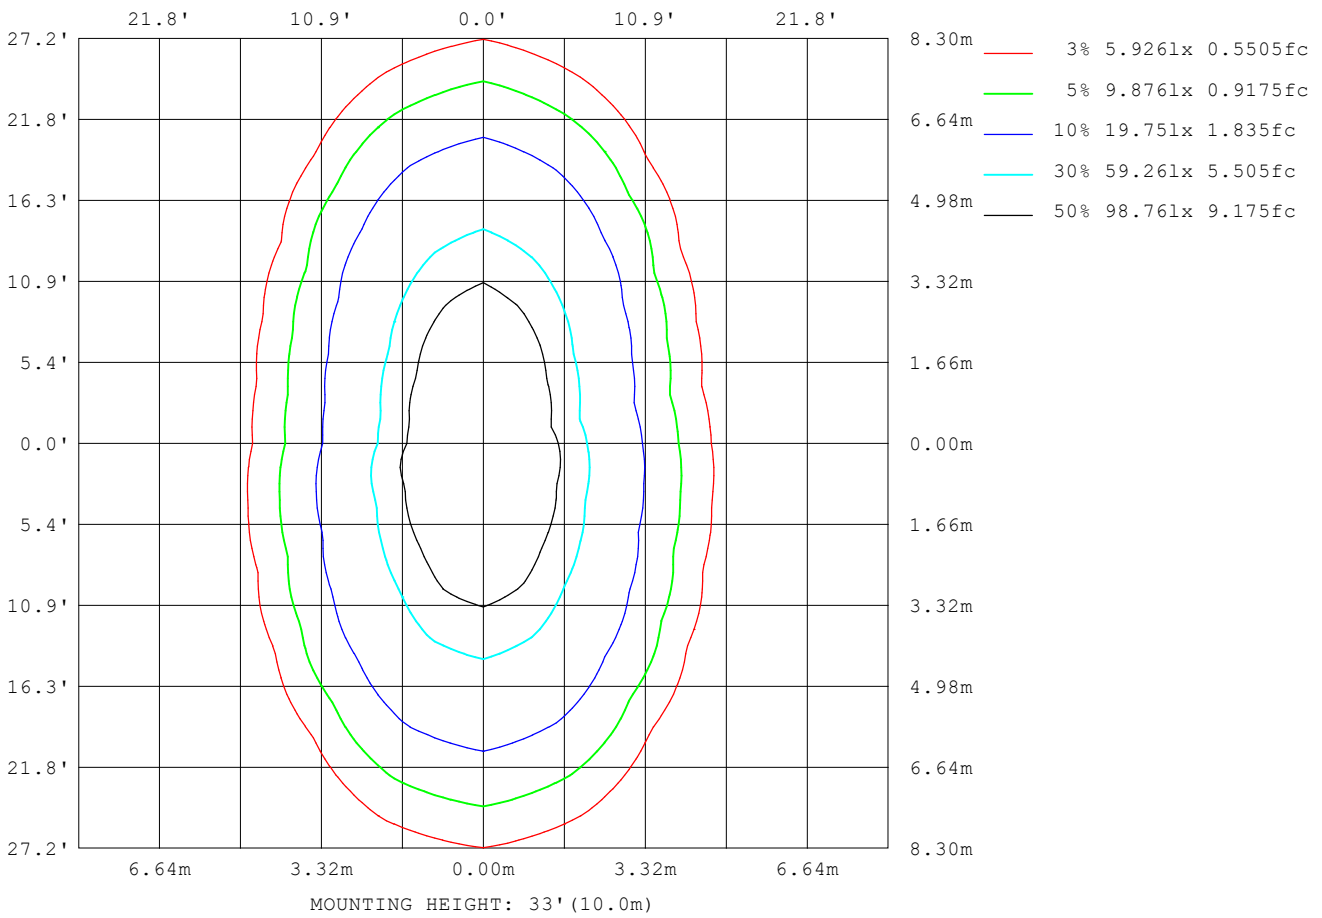

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

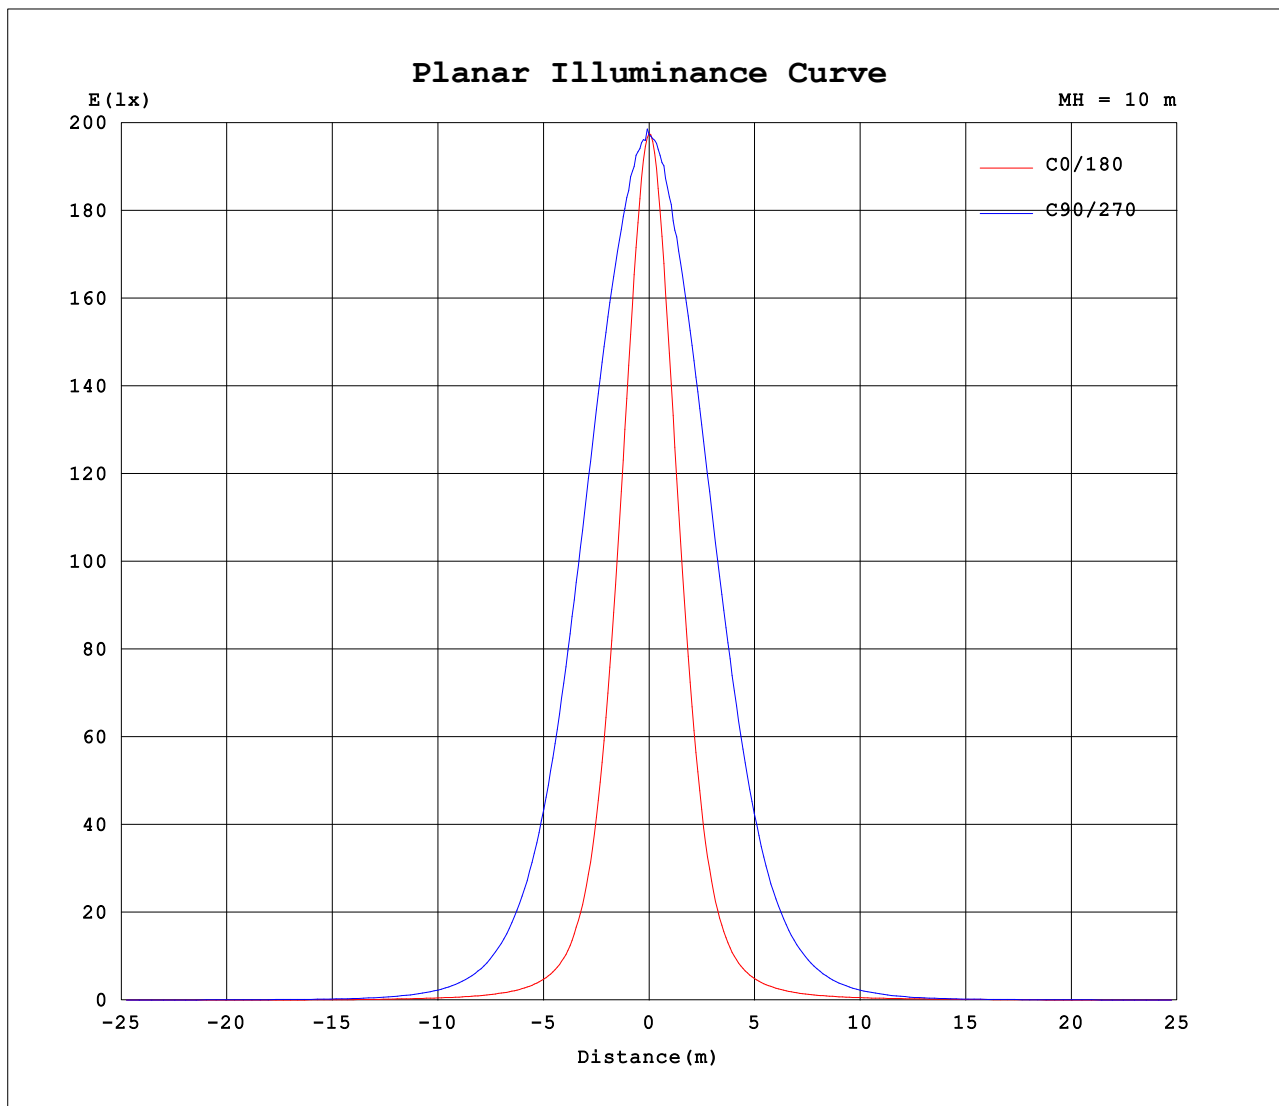


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: SENPU
 Test Date: 2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity: 61%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:221.20V I:0.325A P:71.10W PF:0.988 Freq:50.00Hz Lamp Flux:6016.44x1 lm		
NAME: JSJ-O(12*44°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

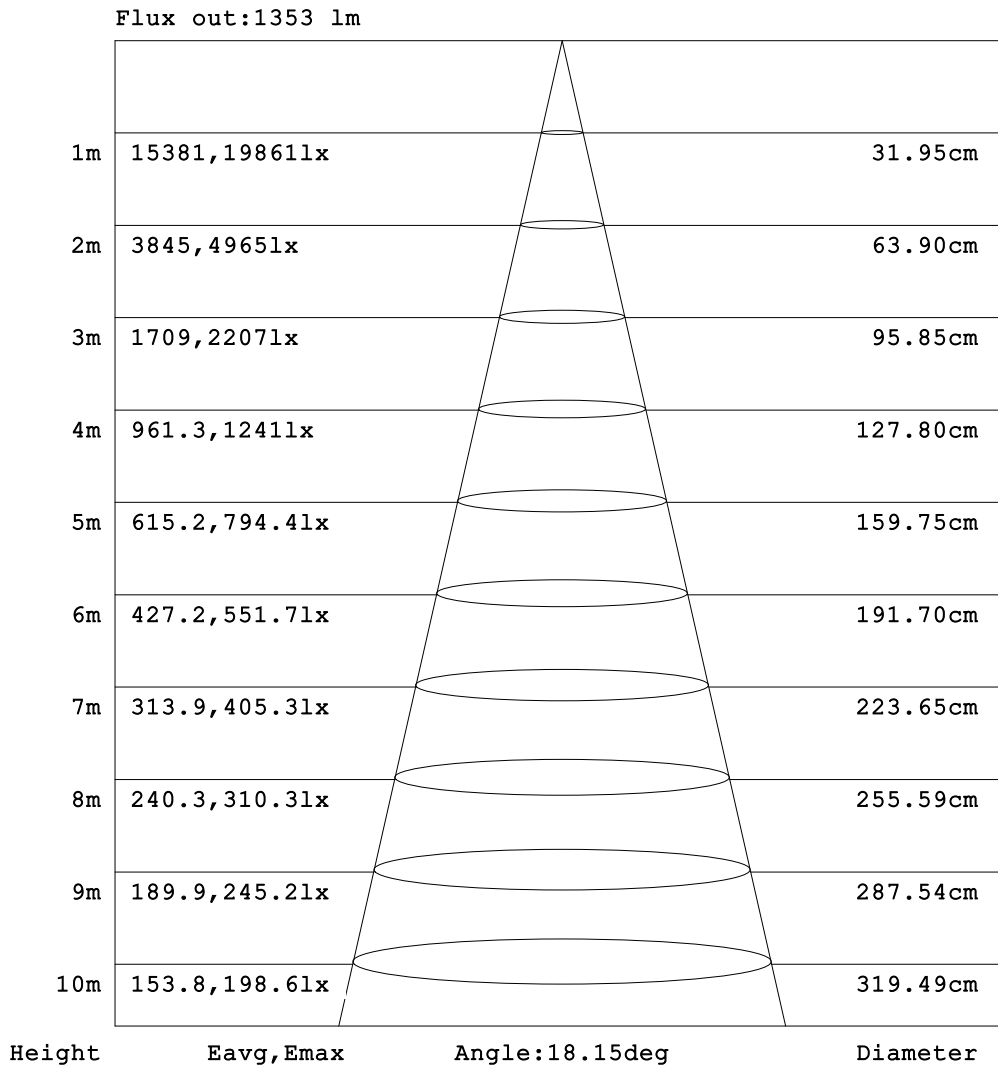

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.20V I:0.325A P:71.10W PF:0.988 Freq:50.00Hz Lamp Flux:6016.44x1 lm		
NAME: JSJ-O(12*44°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-180	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.01	0.02	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.01	0.03	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.01	0.03	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.01	0.03	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.01	0.04	0.06	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.01	0.04	0.07	0.10	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.01	0.04	0.07	0.10	0.10	0.10	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.01	0.04	0.07	0.10	0.10	0.09	0.09	0.09	0.10	0.10	0.10	0.10	0.10	0.10	0.11	0.11	0.12	0.13	0.13	
-90	0.01	0.04	0.06	0.09	0.09	0.08	0.08	0.08	0.07	0.07	0.07	0.07	0.08	0.08	0.08	0.08	0.09	0.09	0.10	
-80	0.01	0.04	0.07	0.09	0.09	0.08	0.08	0.08	0.09	0.10	0.12	0.18	0.38	1.35	2.34	3.29	3.55	3.75	3.92	
-70	0.01	0.04	0.07	0.08	0.09	0.10	0.12	0.14	0.44	1.09	2.05	3.15	4.26	5.06	5.58	5.99	6.32	6.59	6.82	
-60	0.01	0.05	0.07	0.09	0.12	0.14	0.26	1.32	2.66	4.46	6.51	7.72	8.56	9.26	10.2	11.0	11.7	12.3	12.7	
-50	0.01	0.05	0.06	0.11	0.14	0.47	1.91	3.66	6.42	9.55	11.7	13.5	15.3	17.7	21.1	25.6	30.3	33.3	35.2	
-40	0.01	0.05	0.07	0.13	0.17	1.71	3.81	7.35	11.2	13.6	15.8	18.6	22.8	29.9	40.9	62.7	90.9	110	124	
-30	0.01	0.04	0.08	0.14	0.73	2.79	5.82	10.4	13.2	15.2	17.8	22.6	31.0	47.2	82.0	144	255	359	420	
-20	0.01	0.04	0.08	0.14	1.26	3.69	7.76	11.8	13.7	16.1	20.1	27.1	39.9	70.5	134	288	550	898	1054	
-10	0.01	0.04	0.08	0.14	1.52	4.14	8.64	12.2	14.0	16.8	21.9	30.9	49.2	87.6	181	407	864	1395	1696	
0	0.01	0.04	0.08	0.13	1.50	4.10	8.53	12.0	13.8	16.6	21.8	30.9	48.3	83.4	172	398	886	1562	1975	
10	0.01	0.04	0.08	0.14	1.41	3.93	8.34	12.1	13.9	16.5	21.1	29.2	44.6	78.7	159	358	748	1333	1665	
20	0.01	0.04	0.08	0.14	1.04	3.26	6.96	11.4	13.6	15.9	19.5	25.9	37.8	64.7	119	262	509	834	1023	
30	0.01	0.04	0.07	0.13	0.42	2.28	4.92	9.72	13.0	15.2	17.6	22.1	29.4	44.0	76.9	135	238	339	408	
40	0.01	0.04	0.05	0.12	0.14	1.25	3.20	6.45	10.7	13.3	15.4	18.1	22.1	28.9	39.3	59.0	84.4	106	124	
50	0.01	0.04	0.05	0.09	0.13	0.25	1.53	3.23	5.64	8.76	10.9	12.6	14.4	16.8	19.6	23.2	27.2	31.0	33.6	
60	0.01	0.04	0.04	0.06	0.09	0.13	0.14	0.96	2.21	3.65	5.48	6.93	7.94	8.64	9.32	9.89	10.7	11.4	12.0	
70	0.01	0.02	0.04	0.05	0.06	0.07	0.10	0.12	0.16	0.62	1.57	2.64	3.75	4.59	5.11	5.46	6.00	6.56	7.06	
80	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.06	0.07	0.09	0.10	0.12	0.14	0.86	1.77	2.68	3.23	3.69	4.12	
90	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.04	0.02	0.01
100	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
110	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.01	0.02	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.01	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.01	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.01	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.01	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.01	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.20V I:0.325A P:71.10W PF:0.988 Freq:50.00Hz Lamp Flux:6016.44x1 lm		
NAME: JSJ-O(12*44°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: x10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.13	0.12
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.13	0.12
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.13	0.12
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.13	0.12
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.13	0.12
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.12	0.13	0.12
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.10	0.12	0.12	0.12
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.10	0.10	0.11	0.12	0.12	0.12
-100	0.14	0.16	0.17	0.17	0.16	0.16	0.15	0.13	0.12	0.11	0.11	0.10	0.10	0.11	0.11	0.11	0.12	0.12
-90	0.11	0.12	0.13	0.13	0.13	0.13	0.12	0.11	0.11	0.11	0.10	0.10	0.10	0.11	0.11	0.11	0.12	0.12
-80	3.44	2.92	2.34	1.51	0.74	0.16	0.15	0.14	0.13	0.13	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12
-70	6.56	6.24	5.76	4.72	3.59	2.48	1.60	0.73	0.13	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12
-60	12.3	11.6	10.8	9.69	8.46	6.82	4.89	3.27	2.07	0.98	0.18	0.11	0.12	0.12	0.12	0.12	0.13	0.12
-50	32.8	29.4	24.7	20.3	16.8	14.2	11.6	8.15	4.96	2.91	1.53	0.36	0.12	0.12	0.12	0.12	0.13	0.12
-40	108	86.6	59.4	38.6	28.5	21.8	17.4	13.5	8.95	5.17	3.15	1.56	0.18	0.12	0.13	0.12	0.13	0.12
-30	347	241	133	75.4	44.1	29.3	21.2	16.1	12.6	8.07	4.68	2.52	0.92	0.13	0.13	0.13	0.12	0.12
-20	862	513	264	121	64.9	37.4	25.3	18.3	14.1	9.85	5.84	3.34	1.55	0.13	0.13	0.13	0.12	0.12
-10	1344	798	365	159	79.3	45.1	28.7	19.8	14.9	11.0	6.80	3.87	1.88	0.18	0.14	0.13	0.12	0.12
0	1535	858	384	164	80.3	46.2	29.5	20.0	15.0	11.0	6.87	3.92	1.92	0.16	0.14	0.14	0.12	0.12
10	1281	689	316	138	69.7	40.2	26.4	18.7	14.5	10.5	6.37	3.65	1.75	0.14	0.13	0.13	0.12	0.12
20	802	476	237	105	58.1	34.4	23.7	17.5	13.5	8.99	5.27	2.95	1.28	0.13	0.13	0.12	0.11	0.12
30	328	224	124	70.1	40.5	27.4	20.4	15.9	12.1	7.42	4.16	2.11	0.56	0.12	0.12	0.11	0.11	0.12
40	104	80.0	55.4	36.8	27.3	20.9	16.6	12.8	8.28	4.81	2.77	1.18	0.13	0.11	0.11	0.10	0.11	0.12
50	30.5	26.3	22.2	18.7	15.9	13.1	10.4	7.15	4.31	2.61	1.27	0.20	0.10	0.10	0.09	0.09	0.11	0.12
60	11.3	10.5	9.55	8.75	7.78	6.17	4.35	2.82	1.72	0.68	0.13	0.10	0.10	0.08	0.07	0.08	0.10	0.12
70	6.49	5.86	5.14	4.22	3.20	2.16	1.24	0.43	0.11	0.10	0.10	0.08	0.07	0.06	0.06	0.08	0.10	0.12
80	3.37	2.58	1.72	1.05	0.49	0.11	0.10	0.09	0.08	0.07	0.06	0.06	0.06	0.05	0.04	0.06	0.09	0.12
90	0.02	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.06	0.09	0.12
100	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.06	0.09	0.12
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.02	0.03	0.07	0.09	0.12
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.10	0.12
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.08	0.11	0.12
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.11	0.12
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.12	0.12
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.12	0.12
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.13	0.12
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.13	0.12

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:SENPU
Test Date:2023-07-02

γ Range: 0 - 100DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
Humidity:61%
Test Distance:8.000m [K=1.0000]
Remarks: