

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		8353.1 cd per klm. 0.0 degrees vertical -1.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	33.9V x 32.0H 15.5V x 13.8H 5.7V x 4.9H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	1000.4 lumens per klm. 693.4 lumens per klm. 305.5 lumens per klm. 58.2 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.0 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: SENPU
Test Date: 2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.444
Humidity: 61%
Test Distance: 8.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.20V I:0.327A P:71.40W PF:0.986 Freq:50.00Hz		
Lamp Flux:6679.72x1 lm		
NAME: JSJ-AN(11.3°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

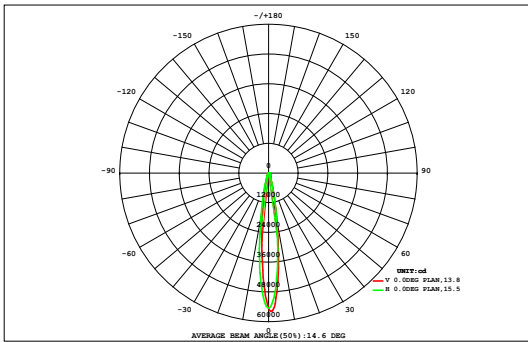

DATA OF LAMP		Eff:93.55lm/W	
MODEL		Imax (cd)	55796
NOMINAL POWER (W)		AVAILABILITY (%)	69.3
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	4627
NOMINAL FLUX (lm)	6679.72	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	6680
TEST VOLTAGE (V)	221.2	θ @50% (H,V)	14,16DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a			
	1.50	1.80	2.14	2.54	2.98	3.37	3.71	3.98	4.12	4.05	3.77	3.40	3.01	2.60	2.20	1.84	1.53	1.28	49.8	0.00			
24	1.77	2.15	2.65	3.26	3.99	4.72	5.38	5.88	6.12	5.98	5.48	4.82	4.11	3.40	2.75	2.22	1.81	1.48	68.0	0.00			
21	2.07	2.61	3.32	4.28	5.49	6.82	8.03	8.97	9.51	9.23	8.21	7.03	5.77	4.53	3.49	2.71	2.14	1.70	95.9	0.00			
18	2.41	3.17	4.22	5.70	7.60	10.1	12.7	14.4	15.7	15.1	12.9	10.6	8.19	6.08	4.47	3.33	2.53	1.95	141	28.1			
15	2.77	3.81	5.34	7.51	10.6	15.0	20.4	24.2	26.6	25.3	20.8	16.4	11.6	8.10	5.72	4.07	2.95	2.19	213	135			
12	3.12	4.46	6.55	9.81	14.9	21.9	32.0	41.5	46.0	42.8	33.9	24.4	16.1	10.7	7.13	4.84	3.37	2.42	326	261			
9	3.43	5.08	7.69	12.2	19.8	31.6	48.1	68.1	77.0	69.8	52.3	34.0	21.8	13.7	8.49	5.54	3.72	2.63	485	428			
6	3.72	5.60	8.65	14.1	23.7	40.8	67.5	98.3	116	102	70.7	44.8	26.6	15.7	9.60	6.20	4.13	2.87	662	608			
3	3.89	5.91	9.34	15.7	26.8	46.7	78.9	120	145	124	84.3	51.9	30.8	18.3	11.0	6.91	4.51	3.06	788	737			
0	3.98	6.09	9.78	16.7	29.1	51.6	87.4	128	147	132	92.6	57.8	34.1	19.8	11.7	7.16	4.62	3.12	842	791			
-3	3.97	6.08	9.78	16.5	27.9	46.4	73.7	106	120	107	77.9	49.4	30.2	18.4	11.0	6.85	4.46	3.04	718	667			
-6	3.76	5.61	8.62	13.7	21.8	35.1	54.3	71.6	81.8	74.2	55.9	38.6	24.1	14.9	9.38	6.09	4.08	2.84	526	470			
-9	3.34	4.80	7.07	10.7	16.6	25.3	34.9	44.9	49.8	46.2	36.9	26.5	18.3	11.8	7.64	5.14	3.57	2.57	356	295			
-12	2.89	3.98	5.69	8.23	12.1	16.7	21.7	27.2	28.9	27.4	23.4	17.4	12.7	8.95	6.14	4.26	3.05	2.27	233	160			
-15	2.47	3.29	4.48	6.17	8.31	10.8	13.6	16.3	16.9	16.2	14.5	11.4	8.61	6.50	4.78	3.50	2.60	1.98	152	46.7			
-18	2.11	2.71	3.51	4.53	5.75	7.12	8.64	9.86	10.1	9.77	8.95	7.48	5.96	4.69	3.66	2.83	2.20	1.73	102	0.00			
-21	1.80	2.23	2.75	3.36	4.06	4.86	5.67	6.23	6.36	6.19	5.77	5.04	4.19	3.43	2.81	2.28	1.85	1.49	70.4	0.00			
-24	1.53	1.84	2.18	2.56	2.97	3.43	3.86	4.12	4.17	4.09	3.88	3.52	3.05	2.59	2.20	1.85	1.55	1.29	50.7	0.00			
-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)															
Φ t	50.5	71.2	104	157	244	382	580	799	912	821	612	414	269	174	114	77.6	54.7	39.9	5879	---			
Φ a	0.00	0.00	0.00	47.8	172	319	524	747	862	770	558	353	198	75.8	0.00	0.00	0.00	0.00	---	4627			


one-half-peak spread: U:7.8,D:7.8 , L:7.1,R:6.8 NEMA Beam Type: Type 3

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:221.20V I:0.327A P:71.40W PF:0.986 Freq:50.00Hz Lamp Flux:6679.72x1 lm		
NAME: JSJ-AN(11.3°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

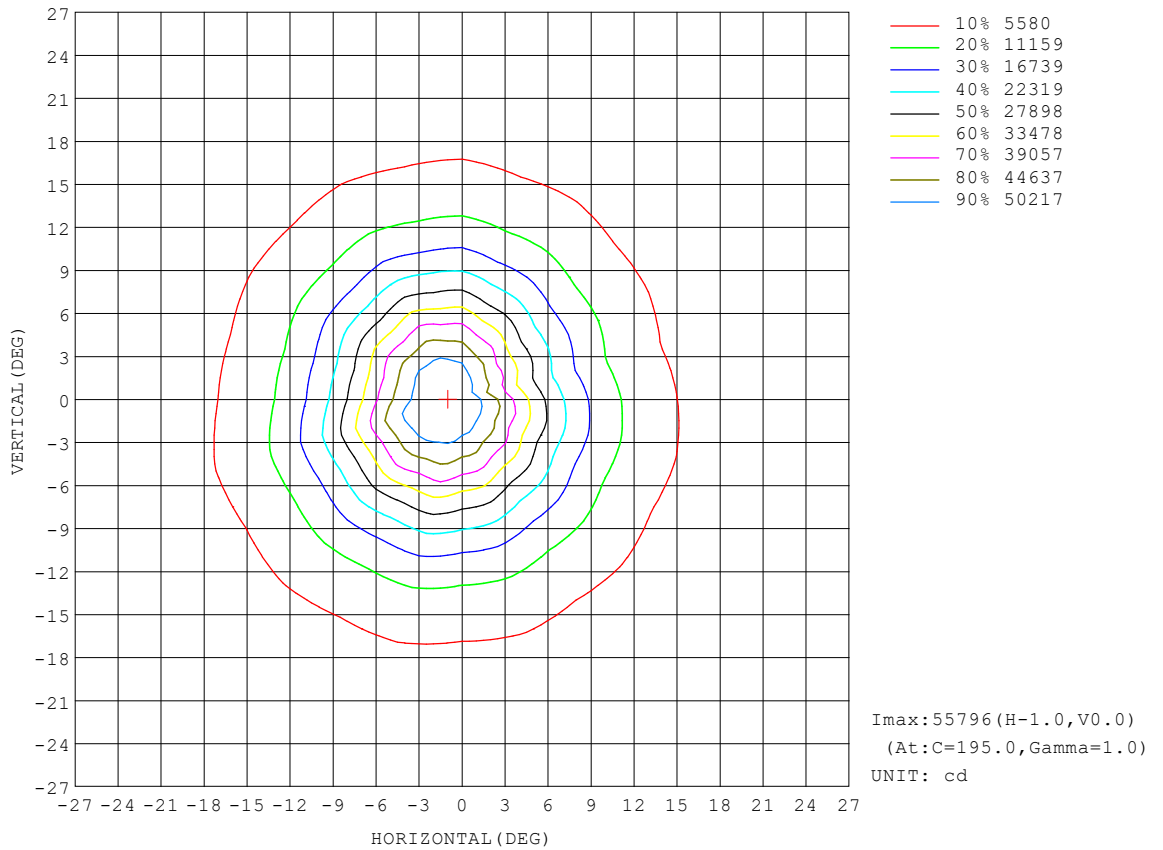


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:221.20V I:0.327A P:71.40W PF:0.986 Freq:50.00Hz		
Lamp Flux:6679.72x1 lm		
NAME: JSJ-AN(11.3°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

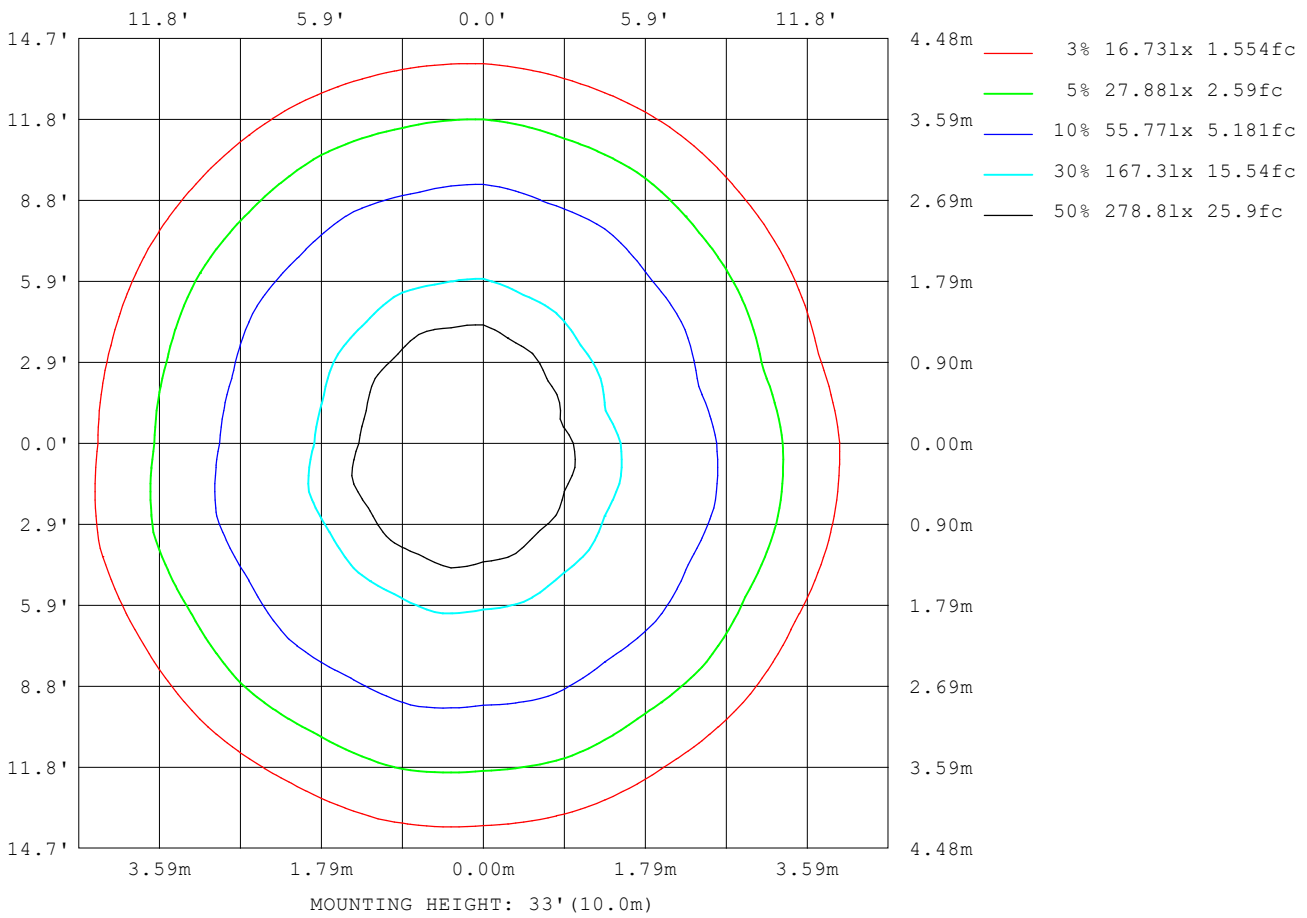

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

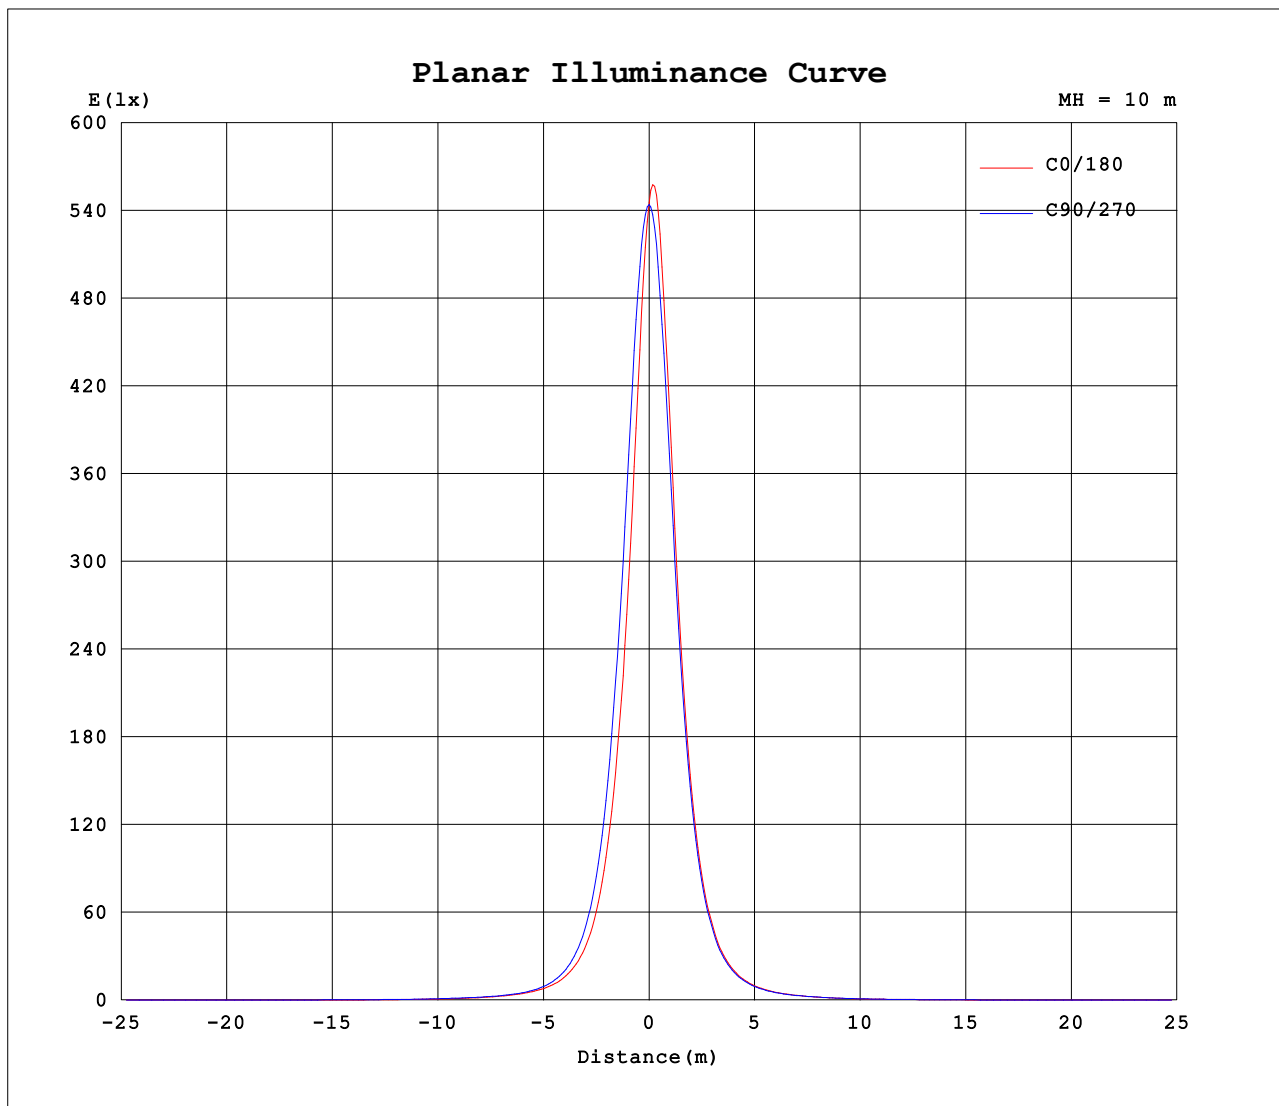


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: SENPU
 Test Date: 2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity: 61%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:221.20V I:0.327A P:71.40W PF:0.986 Freq:50.00Hz Lamp Flux:6679.72x1 lm		
NAME: JSJ-AN(11.3°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

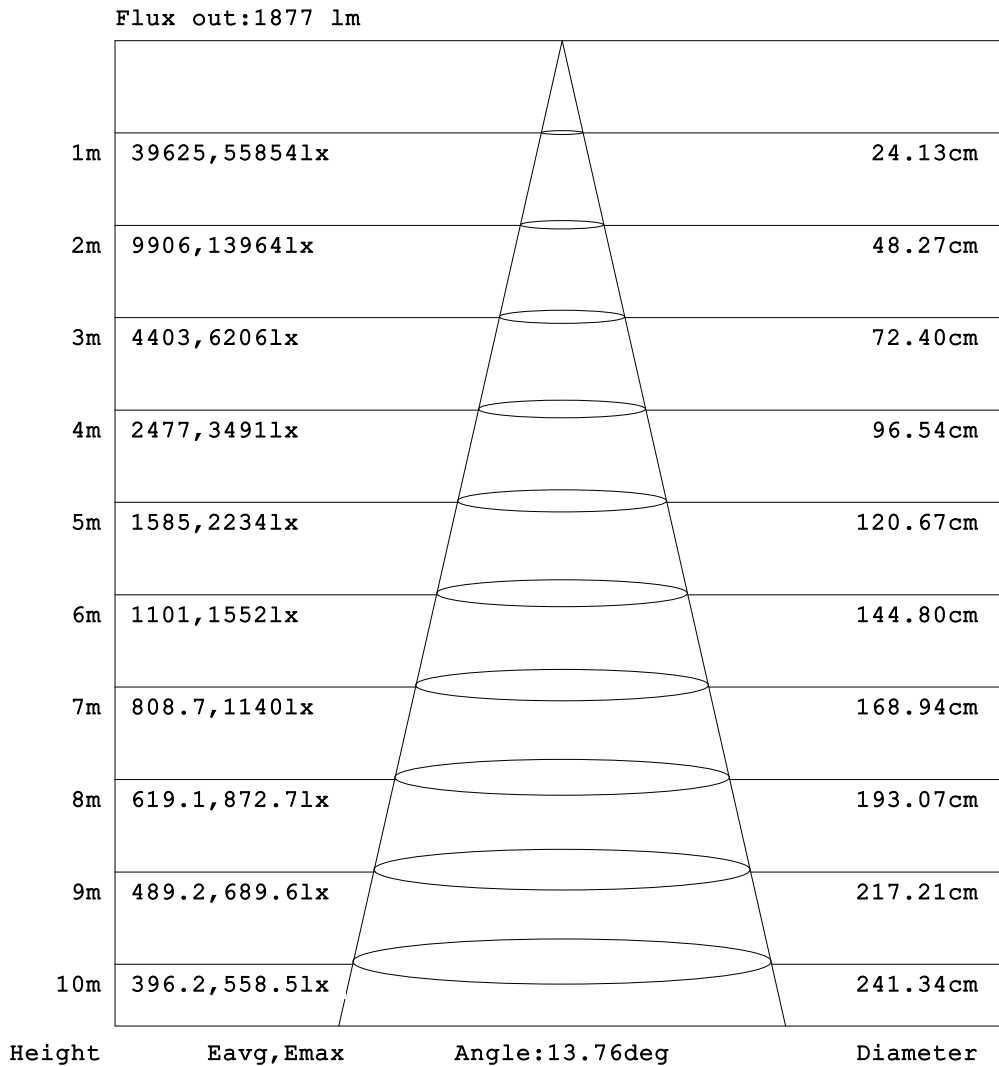

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:SENPU
Test Date:2023-07-02

γ Range: 0 - 100DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
Humidity:61%
Test Distance:8.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.20V I:0.327A P:71.40W PF:0.986 Freq:50.00Hz Lamp Flux:6679.72x1 lm		
NAME: JSJ-AN(11.3°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.01	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.01	0.02	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.01	0.03	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.01	0.03	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.01	0.03	0.06	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.01	0.03	0.06	0.08	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.01	0.03	0.06	0.09	0.09	0.10	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.01	0.03	0.06	0.08	0.08	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.08	0.09	0.09	0.09	0.09	0.09	0.10
-90	0.01	0.03	0.05	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07
-80	0.01	0.03	0.05	0.07	0.07	0.07	0.07	0.07	0.08	0.10	0.12	0.13	0.16	0.95	1.87	2.79	2.85	2.84	2.81
-70	0.01	0.03	0.06	0.07	0.07	0.09	0.13	0.15	0.19	0.50	1.59	3.15	4.80	5.63	5.98	6.22	6.34	6.39	6.35
-60	0.01	0.03	0.06	0.07	0.11	0.15	0.16	0.53	1.75	3.94	6.89	8.34	9.20	9.85	10.5	11.0	11.4	11.6	11.7
-50	0.01	0.04	0.06	0.10	0.16	0.20	0.91	2.23	5.29	9.04	11.3	12.8	14.2	15.4	16.8	18.1	19.2	20.0	20.4
-40	0.01	0.04	0.06	0.13	0.16	0.71	2.25	5.81	10.8	13.7	16.2	19.0	22.2	25.9	29.9	34.4	38.2	40.5	41.2
-30	0.01	0.04	0.07	0.15	0.25	1.44	4.01	9.88	14.4	17.9	22.3	28.5	37.2	48.8	60.0	71.3	82.6	89.8	89.6
-20	0.01	0.04	0.07	0.15	0.46	2.10	6.24	12.8	17.5	22.6	30.4	43.1	61.5	85.8	125	182	254	328	331
-10	0.01	0.04	0.08	0.16	0.61	2.50	7.61	14.4	19.4	26.3	37.9	58.4	88.3	145	264	521	1066	1706	1908
0	0.01	0.04	0.08	0.15	0.59	2.47	7.57	14.6	19.9	27.1	39.1	59.9	95.1	168	337	785	1960	4382	5453
10	0.01	0.04	0.08	0.16	0.52	2.32	7.13	14.0	19.0	25.7	36.3	54.8	82.7	135	243	478	911	1610	1854
20	0.01	0.04	0.07	0.16	0.34	1.80	5.32	12.0	16.9	22.0	29.6	42.0	61.0	83.9	119	173	243	298	320
30	0.01	0.04	0.06	0.15	0.18	1.14	3.24	8.91	14.1	17.9	22.3	28.3	36.8	48.1	60.3	72.2	81.8	88.8	91.2
40	0.01	0.03	0.05	0.12	0.16	0.45	1.84	4.99	10.4	13.8	16.1	19.0	22.3	26.1	30.3	34.4	37.6	40.0	40.7
50	0.01	0.03	0.05	0.08	0.15	0.17	0.69	1.90	4.65	8.66	11.3	12.9	14.4	15.9	17.2	18.2	19.1	19.9	20.2
60	0.01	0.02	0.05	0.05	0.09	0.14	0.16	0.37	1.37	3.13	6.04	8.15	9.36	10.2	10.7	11.2	11.6	11.9	12.0
70	0.01	0.02	0.04	0.05	0.06	0.07	0.10	0.14	0.15	0.24	1.15	2.85	4.70	5.63	6.02	6.27	6.52	6.71	6.83
80	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.11	0.13	0.14	0.84	1.70	2.64	2.85	2.97	3.05
90	0.01	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.04	0.02	0.01
100	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
110	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.01	0.02	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.01	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.01	0.01	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.01	0.01	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.20V I:0.327A P:71.40W PF:0.986 Freq:50.00Hz Lamp Flux:6679.72x1 lm		
NAME: JSJ-AN(11.3°)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.10	0.11
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.10	0.11
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.10	0.11
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.10	0.11
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.10	0.11
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.09	0.10	0.11
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.08	0.09	0.10	0.11
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.08	0.08	0.08	0.09	0.10	0.11
-100	0.10	0.11	0.11	0.11	0.10	0.10	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.09	0.09	0.10	0.10	0.11
-90	0.07	0.07	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.10	0.10	0.10	0.11	0.11
-80	2.68	2.51	2.25	1.45	0.72	0.16	0.15	0.15	0.14	0.14	0.13	0.13	0.12	0.12	0.12	0.11	0.11	0.11
-70	6.41	6.39	6.19	5.31	4.15	2.70	1.53	0.71	0.23	0.14	0.14	0.14	0.13	0.12	0.11	0.11	0.11	0.11
-60	11.6	11.4	11.0	10.5	9.81	8.21	5.73	2.97	1.64	0.84	0.23	0.13	0.13	0.13	0.12	0.11	0.11	0.11
-50	19.9	19.1	17.9	16.6	15.2	13.8	12.2	8.94	5.00	2.37	1.16	0.44	0.13	0.13	0.13	0.11	0.11	0.11
-40	39.5	36.5	32.9	28.6	24.7	21.2	17.9	14.4	9.78	4.88	2.36	1.20	0.36	0.13	0.13	0.12	0.11	0.11
-30	85.4	75.5	63.2	52.1	42.0	33.4	26.1	20.1	15.1	9.10	4.07	1.90	0.83	0.13	0.13	0.13	0.11	0.11
-20	296	216	148	101	70.3	50.4	36.8	26.7	19.6	12.7	6.03	2.65	1.23	0.23	0.14	0.13	0.11	0.11
-10	1363	767	367	193	111	70.6	47.8	32.4	22.9	15.5	7.75	3.19	1.48	0.41	0.14	0.13	0.11	0.11
0	3161	1350	561	255	133	79.5	51.8	34.5	24.2	16.2	8.00	3.30	1.54	0.48	0.14	0.14	0.11	0.11
10	1281	663	339	180	104	66.7	45.5	31.2	22.3	14.8	7.18	3.03	1.40	0.37	0.14	0.13	0.10	0.11
20	271	208	143	97.3	69.3	50.5	36.4	26.2	19.0	11.4	5.14	2.38	1.10	0.15	0.13	0.12	0.10	0.11
30	84.7	75.0	64.5	53.0	42.5	33.7	26.2	20.3	14.9	8.40	3.62	1.63	0.63	0.13	0.13	0.11	0.10	0.11
40	39.3	36.6	33.2	29.3	25.2	21.4	17.9	14.3	9.42	4.44	2.13	1.01	0.17	0.12	0.12	0.10	0.10	0.11
50	19.8	19.0	18.0	16.9	15.6	14.0	11.9	8.42	4.50	2.11	1.05	0.31	0.12	0.12	0.11	0.09	0.10	0.11
60	11.9	11.6	11.2	10.7	10.0	8.15	5.32	2.58	1.42	0.69	0.16	0.12	0.11	0.10	0.08	0.08	0.09	0.11
70	6.70	6.50	6.14	5.16	3.86	2.37	1.28	0.50	0.12	0.12	0.11	0.10	0.09	0.07	0.06	0.07	0.09	0.11
80	2.75	2.39	1.93	1.18	0.54	0.12	0.11	0.11	0.10	0.08	0.07	0.06	0.06	0.06	0.05	0.07	0.09	0.11
90	0.02	0.04	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.06	0.08	0.11
100	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.05	0.08	0.11
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.02	0.03	0.05	0.08	0.11
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.06	0.08	0.11
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.06	0.08	0.11
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.09	0.11
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.09	0.11
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.10	0.11
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.10	0.11
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.10	0.11

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:SENPU
 Test Date:2023-07-02

γ Range: 0 - 100DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.444
 Humidity:61%
 Test Distance:8.000m [K=1.0000]
 Remarks: